



CONTACT US

PARA LIGHT ELECTRONICS CO., LTD.

🏠 11F, No. 8, Jiankang Rd., Zhonghe Dist., New Taipei City 23586, Taiwan

✉ para@para.com.tw

☎ T +886-2-2225-3733 F +886-2-2225-4800

🌐 www.para.com.tw

2022 Commercial Lighting



Chairman Mr. David Ma
 Established in 1987
 Capital USD 37million
 No. of Employee 1028

Founded in 1987, PARA LIGHT is now a global innovator and leader in visible and invisible LED fields. With two manufacturing plants certified with ISO 14001, ISO 9001, TS16969, and also complies with REACH and RoHS.

We offer advanced and beyond expectation R&D services based on the strongest lineup ever of 1,028 employees located in different countries and cities that includes more than 70 professional engineers, and 80 Quality Assurance squad.

About the product category, from the elementary LED component to further appliance such as UV sensor, LED back light, integrated light module, commercial lighting, automotive lighting and any lighting solution, PARA LIGHT keeps growing and expanding the products diversity in response to the global industry or market trend.

Recessed light



| | |
|------------|-------|
| PL-RD1070K | 08-09 |
| PL-RD1092K | |
| PL-RD1125K | |

Recessed Spotlight



| | |
|------------|-------|
| PL-RS1075B | 10-11 |
| PL-RS1092B | |

Spotlight



| | |
|------------|-------|
| PL-T31045A | 12-13 |
| PL-T31055A | |
| PL-T31060A | |
| PL-SP046MD | 14 |
| PL-RS018A | 15 |

Pendant Light



PL-SF1088D
PL-SP1095A

16-17

Slide Series



PL-RS1034A

18-19

Surface Mount



PL-SF1055A
PL-SF1075A
PL-SF1095A

20-21

Ceiling Light



PL-DS1075B
PL-DS1092B

22-23

Downlight




| | |
|------------|-------|
| PL-DM4070D | 24-25 |
| PL-DM5093D | |
| PL-DM5125D | |
| PL-DM5070S | 26 |
| PL-DM5105S | |
| PL-DL111A | 27 |






PL-RD1070K

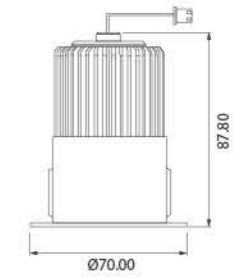


| LED | Diameter | Power | Height | Input Voltage | CCT | Optics |
|--------------|----------|-------|---------|----------------|----------------------------|-----------------|
| Bridgelux C8 | Ø 70 mm | 9 W | 87.8 mm | DC 37V, 250 mA | 2700 / 3000 / 4000 / 5000K | 18° / 25° / 35° |

PL-RD1092K

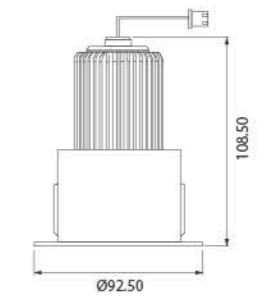

| LED | Diameter | Power | Height | Input Voltage | CCT | Optics |
|----------------|-----------|-------|----------|----------------|----------------------------|-----------------|
| Bridgelux V10B | Ø 92.5 mm | 13 W | 108.5 mm | DC 37V, 350 mA | 2700 / 3000 / 4000 / 5000K | 18° / 25° / 35° |


PL-RD1125K

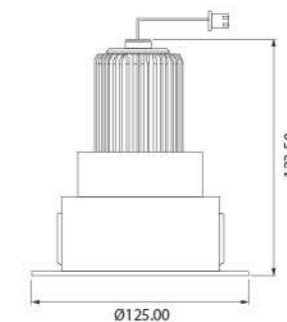


| LED | Diameter | Power | Height | Input Voltage | CCT | Optics |
|----------------|----------|-------|----------|---------------|----------------------------|-----------------|
| Bridgelux V10B | Ø 125 mm | 13 W | 123.5 mm | DC 37V, 350mA | 2700 / 3000 / 4000 / 5000K | 18° / 25° / 35° |



Recessed Spotlight




PL-RS1075B

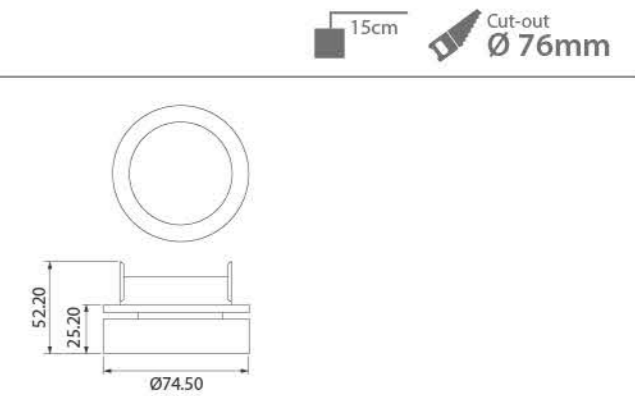

| LED | Diameter | Power | Height | Input Voltage | CCT | Optics |
|---------------|----------|-------|--------|-----------------|---------------------|--------|
| Bridgelux V8E | Ø 74 mm | 9 W | 52mm | DC 37 V, 250 mA | 3000 / 4000 / 5000K | 11° |


PL-RS1092B

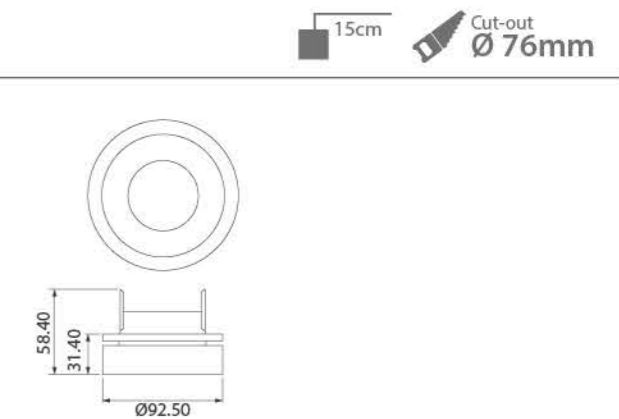

| LED | Diameter | Power | Height | Input Voltage | CCT | Optics |
|----------------|-----------|-------|--------|-----------------|---------------------|--------|
| Bridgelux V10B | Ø 92.5 mm | 13 W | 59 mm | DC 37 V, 350 mA | 3000 / 4000 / 5000K | 11° |




Adaptor : compatible with most track systems
Mounting types for options :




Interchangeable baffle

PL-T31045A

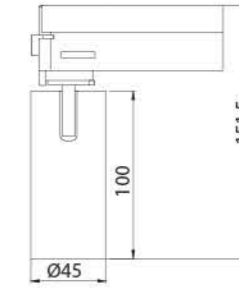


| LED | Diameter | Power | Height | Input Voltage | CCT | Optics |
|--------------------------|----------|-------|----------|---------------|----------------------------|-----------------|
| Bridgelux V8E (DC 250mA) | Ø 45 mm | 9 W | 151.5 mm | AC 110-230 V | 2700 / 3000 / 4000 / 5000K | 15° / 24° / 36° |

PL-T31055A

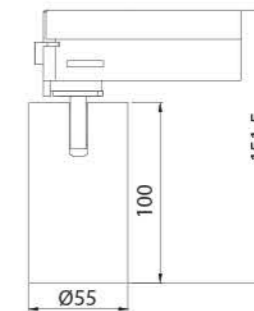

| LED | Diameter | Power | Height | Input Voltage | CCT | Optics |
|--------------------------|----------|-------|----------|---------------|----------------------------|-----------------|
| Bridgelux V8E (DC 300mA) | Ø 55 mm | 11 W | 151.5 mm | AC 110-230 V | 2700 / 3000 / 4000 / 5000K | 15° / 24° / 36° |

PL-T31060A

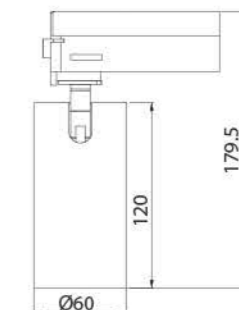


| LED | Diameter | Power | Height | Input Voltage | CCT | Optics |
|---------------------------|----------|-------|--------|---------------|----------------------------|-----------------|
| Bridgelux V18B (DC 350mA) | Ø 60 mm | 13 W | 120 mm | AC 110-230 V | 2700 / 3000 / 4000 / 5000K | 15° / 24° / 36° |

PL-SP046MD

Features

- Interchangeable frames and lens bring the wide variations
- Track or flush mount compatibilities
- Driver-free

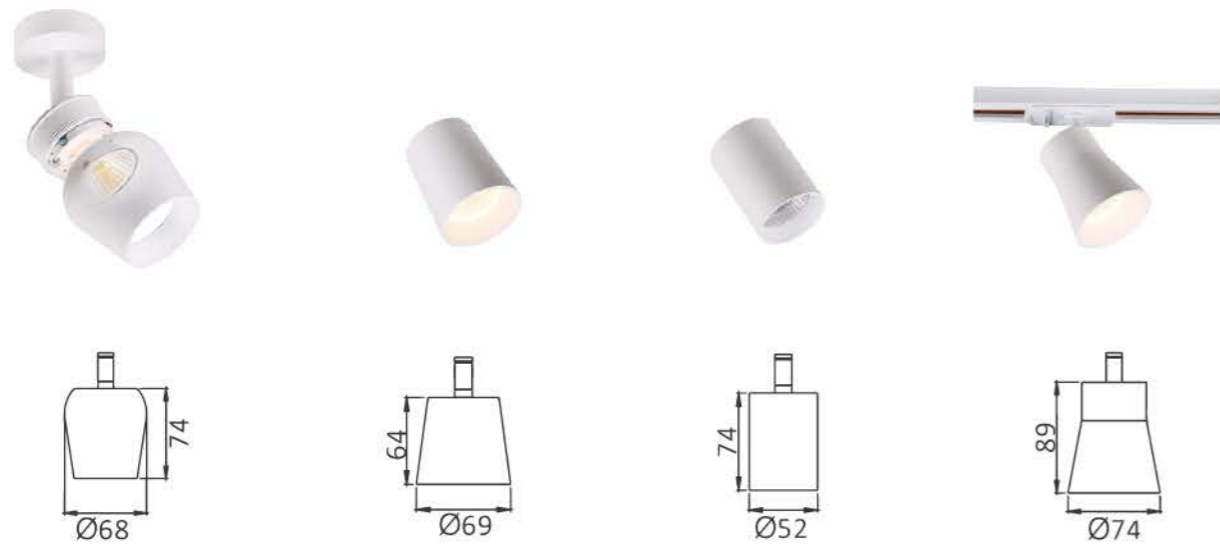

| LED | Power | Input Voltage | CCT | Optics |
|------------------|-------|---------------|--------------------|-----------------------|
| Bridgelux / CREE | 8 W | AC 220 V | 3000 / 4000 / 5000 | 15° / 25° / 38° / 60° |

PL-RS018A

Features


- Micro Spotlight
- Simply styled
- Warm Dim Technology



| LED | Power | Input Voltage | CCT | Optics |
|------------------|-------|---------------|--------------------|-----------------------|
| Bridgelux / CREE | 8 W | AC 220 V | 3000 / 4000 / 5000 | 15° / 25° / 38° / 60° |




PL-SF1088D

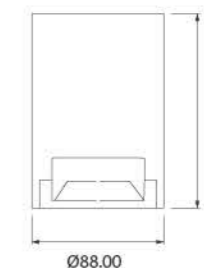

| LED | Diameter | Power | Height | Input Voltage | CCT | Optics |
|--------------|----------|-------|--------|---------------|----------------------------|-----------------------|
| CREE CXA1512 | Ø 88 mm | 13 W | 130 mm | 220 ~ 230 V | 2700 / 3000 / 4000 / 5000K | 15° / 25° / 38° / 60° |

PL-SP1095A

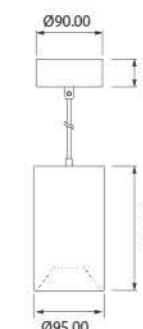


| LED | Diameter | Power | Height | Input Voltage | CCT | Optics |
|--------------|----------|-------|--------|---------------|----------------------------|-----------------------|
| CREE CXA1816 | Ø 95 mm | 18 W | 230 mm | 220 ~ 230 V | 2700 / 3000 / 4000 / 5000K | 15° / 25° / 38° / 60° |



PL-RS1034A

Cut-out
Ø 55mm

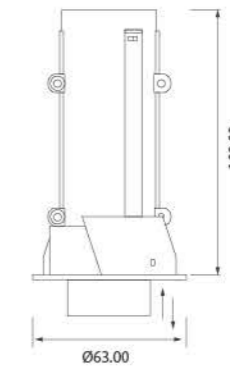

| LED | Diameter | Power | Height | Input Voltage | CCT | Optics |
|----------------|----------|-------|--------|----------------|----------------------------|-----------------|
| LUMINES SST 20 | Ø 63 mm | 4.5 W | 109 mm | DC 3V, 1500 mA | 2700 / 3000 / 4000 / 5000K | 20° / 30° / 40° |




Surface Mount

Features


- Aluminum Cylinder Tube
- Tunable White Technology
- Series Products
- Removable Baffle Reflector
- Honeycomb Louver options
- Custom color

PL-SF1055A

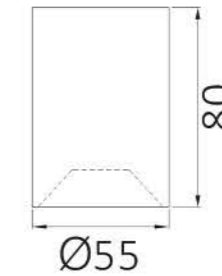


| LED | Diameter | Power | Height | Input Voltage | CCT | Optics |
|------------------|----------|-------|--------|---------------|------|-----------------------|
| Bridgelux / CREE | Ø 55 mm | 8 W | 80 mm | AC 220 V | 3000 | 15° / 25° / 38° / 60° |

PL-SF1075A

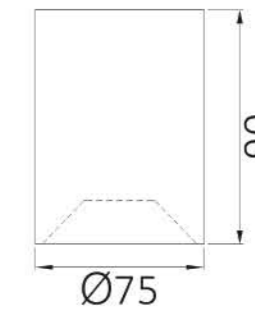

| LED | Diameter | Power | Height | Input Voltage | CCT | Optics |
|------------------|----------|-------|--------|---------------|------|-----------------------|
| Bridgelux / CREE | Ø 75 mm | 13 W | 90 mm | AC 220 V | 3000 | 15° / 25° / 38° / 60° |

PL-SF1095A

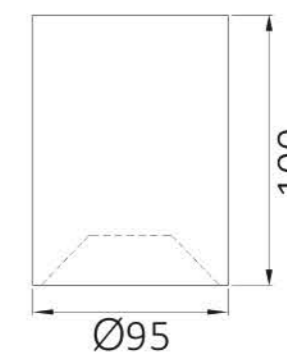

| LED | Diameter | Power | Height | Input Voltage | CCT | Optics |
|------------------|----------|-------|--------|---------------|------|-----------------------|
| Bridgelux / CREE | Ø 95 mm | 18 W | 100 mm | AC 220 V | 3000 | 15° / 25° / 38° / 60° |




Ceiling Light

Features

- Ultra Slim for more placements
- Fully Adjustable and Rotational allows a greater aiming flexibility
- Removable front ring gives the change of lens degree as desired
- Warm Dim Technology

PL-DS1075B

Cut-out
Ø 65mm

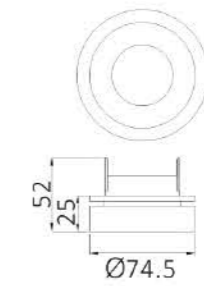


Ø65.0

| LED | Diameter | Power | Height | Input Voltage | CCT | Optics |
|------------------|-----------|-------|--------|---------------|----------------|-----------------|
| Bridgelux / CREE | Ø 74.5 mm | 9 W | 52 mm | DC36V 250mA | 3000/4000/5000 | 18° / 24° / 36° |

PL-DS1092B

Cut-out
Ø 76mm

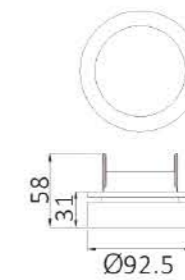

Ø76.0

| LED | Diameter | Power | Height | Input Voltage | CCT | Optics |
|------------------|-----------|-------|--------|---------------|----------------|-----------------|
| Bridgelux / CREE | Ø 92.5 mm | 13 W | 58 mm | DC36V 350mA | 3000/4000/5000 | 18° / 24° / 36° |




Downlight

Features

- Series Product
- All parts removable, wide variations to be created with ease and fast
- Trimless kit / Driver box available
- Warm Dim Technology
- Custom color

PL-DM4070D

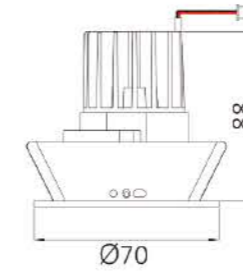


Ø60.0

Cut-out
Ø 60mm

| LED | Diameter | Power | Height | Input Voltage | CCT | Optics |
|------------------|----------|-------|--------|---------------|--------------------|-----------------|
| Bridgelux / CREE | Ø 70 mm | 9 W | 88 mm | DC 36V 250mA | 3000 / 4000 / 5000 | 18° / 25° / 35° |

PL-DM5093D

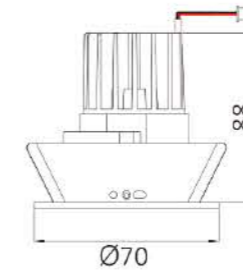


Ø60.0

Cut-out
Ø 60mm

| LED | Diameter | Power | Height | Input Voltage | CCT | Optics |
|------------------|----------|-------|--------|---------------|--------------------|-----------------------|
| Bridgelux / CREE | Ø 70 mm | 13 W | 88 mm | DC 36V 250mA | 3000 / 4000 / 5000 | 15° / 25° / 38° / 60° |

PL-DM5125D

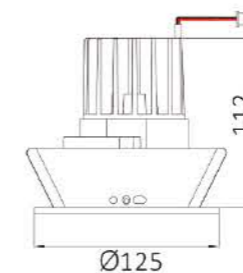


Ø105.0

Cut-out
Ø 105mm

| LED | Diameter | Power | Height | Input Voltage | CCT | Optics |
|------------------|----------|-------|--------|---------------|--------------------|-----------------------|
| Bridgelux / CREE | Ø 125 mm | 18 W | 112 mm | DC 36V 250mA | 3000 / 4000 / 5000 | 15° / 25° / 38° / 60° |

PL-DM5070S

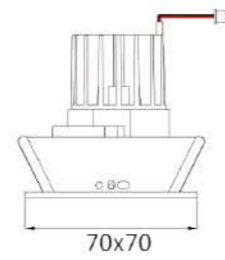


Ø63x63

Cut-out
Ø 63mm

| LED | Power | Input Voltage | CCT | Optics |
|------------------|-------|---------------|--------------------|-----------------------|
| Bridgelux / CREE | 9 W | DC 36V 25mA | 3000 / 4000 / 5000 | 15° / 25° / 38° / 60° |

PL-DM5105S

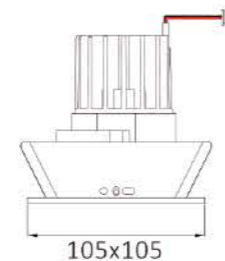

Ø98x98


Cut-out
Ø 98mm

| LED | Power | Input Voltage | CCT | Optics |
|------------------|-------|---------------|--------------------|-----------------------|
| Bridgelux / CREE | 13 W | DC 36V 35mA | 3000 / 4000 / 5000 | 15° / 25° / 38° / 60° |

PL-DL111A

Features

- Miniature Downlight
- Interchangeable frames brings the wide variations
- IP65 rated
- Warm Dim Technology

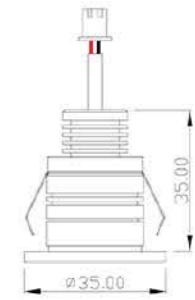

| LED | Power | Input Voltage | CCT | Optics |
|------------------|-------|---------------|--------------------|-----------------------------|
| Bridgelux / CREE | 2 W | DC 3V 700mA | 3000 / 4000 / 5000 | 15° / 25° / 30° / 40° / 60° |



► Headquarters

光鼎電子股份有限公司
Para Light Electronics Co., Ltd.

新北市中和區建康路8號11樓
11F, No. 8, Jiankang Rd., Zhonghe Dist. New Taipei City, 23586 Taiwan
T+886-2-2225-3733
F+886-2-2225-4800
para@para.com.tw
www.para.com.tw

► Factory

連雲港光鼎電子有限公司
Para Light Lianyungang Electronics Co., Ltd.

中國江蘇省連雲港市灌南線經濟開發區威海路8號
No.8, Wei Hai Rd., Guannan Economics Deveopment Zone,
Lianyungang City, Jiangsu Province, 223500, China
T+86-518-8369-2888
F+86-518-8369-2899
para@para.com.tw

南京華鼎電子有限公司
Para Light Nanjing Electronics Co., Ltd.

中國江蘇省南京市江寧區湯山街湯泉西路1號
No.1, Tanguan W. Rd., Tangshan Ave., Jianning Dist. Nanjing City,
Jiansu Province, 211131 China
T+86-25-8410-7685
F+86-25-8410-7684

緬甸光鼎電子有限公司(仰光)
Para Light Yangon Electronics Co., Ltd. (Myanmar)

No. 212, Pyin Si Minthar Gyi Street, Shwe Lin Ban Industry,
Hlaing Thar Yar Township, Yangon, Myanmar
T+95-9776964540
susie@parahk.com
www.para.com.tw

► America

美國光鼎分公司
Para Light Corp. USA

515 Spanish Lane, Suite B, Walnut, CA 91789
T+909-468-4866
F+909-468-4876
sales@paralightusa.com
www.paralightusa.com

► India

印度光鼎分公司
Para Light India Pvt. Ltd.

No.979, 9th Floor, Aggarwal Cyber Plaza-2,
Netaji Subhash Place, Pitampura, New Delhi- 110034, India
T+011-41086226
abhinav.jha@para.com.tw

► Greater China-Sales Team

North China : Beijing, Qingdao
East China : Shanghai, Ningbo, Suzhou, Nanjing, Hefei, Wuhan, Zhengzhou
South: Shenzhen, Xiamen, Jiangmen
Central: Chengdu

蘇州光鼎電子有限公司 East China
Para Light (SUZHOU) Electronics Co., Ltd.

蘇州新區獅山路199號新地中心2104室
Room 2104, Xindi Center Building, No.199, Shishan Road
Suzhou City, Jiangsu Province, 215011 China
T+86-133-6527-0527
F+86-512-6809-7669
jeremy@para-lyg.com.cn

光鼎深圳實業有限公司 South China
Para Light (SHENZHEN) Electronics Co., Ltd.

中國深圳市龍華區龍觀東路57號尚美時代大廈1310-1312室
Room 1310-1312, Shangmei Times Building, No.57,
Longguan East Road, Longhua Dist., Shenzhen City,
Guangdong Province, 518110 China
T+86-189-2747-1103
eddy@paralight.com.cn

青島光鼎電子有限公司
Para Light (QINGDAO) Electronics Co., Ltd.

山東省青島市市北區山東路168號時代國際廣場12樓1204室
Room 1204, 12th Floor, Times International Plaza,
No.168 Shandong Road, Shibei District, Qingdao City,
Shandong Province, 266000 China
T+0532-85692571 / 18626429477

光鼎北京辦事處 North China
Para Light (BEIJING) Sales Office

北京市海澱區清和中街橡樹灣二期
Qinghe street, oak bay Phase II building, Haiding District,
Beijing City, 100000 China
T+186-2642-9477 / 181-0107-7619
tianjin@paralight.com.cn

光鼎成都辦事處 Central China
Para Light (CHENGDU) Sales Office

四川省成都市金牛區金沙路169號-現代城1幢10層1008室
Room 1008, 10th Floor, No. 169 Xiandaicheng Building 1, Jinsha Road,
Jinniu District, Chengdu city, Sichuan Province, 610031 China
T+86-18360655305
yangfeiting@para-lyg.com.cn