



CONTACT US

PARA LIGHT ELECTRONICS CO., LTD.

🏠 11F, No. 8, Jiankang Rd., Zhonghe Dist., New Taipei City 23586, Taiwan

✉ para@para.com.tw

☎ T +886-2-2225-3733 F +886-2-2225-4800

🌐 www.para.com.tw

2022 SMD & PLCC Component



Chairman Mr. David Ma

Established in 1987

Capital USD 37million

No. of Employee 1028

Founded in 1987, PARA LIGHT is now a global innovator and leader in visible and invisible LED fields. With two manufacturing plants certified with ISO 14001, ISO 9001, TS16969, and also complies with REACH and RoHS.

We offer advanced and beyond expectation R&D services based on the strongest lineup ever of 1,028 employees located in different countries and cities that includes more than 70 professional engineers, and 80 Quality Assurance squad.

About the product category, from the elementary LED component to further appliance such as UV sensor, LED back light, integrated light module, commercial lighting, automotive lighting and any lighting solution, PARA LIGHT keeps growing and expanding the products diversity in response to the global industry or market trend.

TOP VIEW




SMD Single Color	05-08
SMD Dual Color	09-10
SMD RGB	11
PLCC White	12-13
PLCC Single Color	14
PLCC RGB	15-16
PLCC IR	17

SIDE VIEW



SMD Single Color	19
SMD Dual Color	20
SMD RGB	20
PLCC White	21

RGB+IC

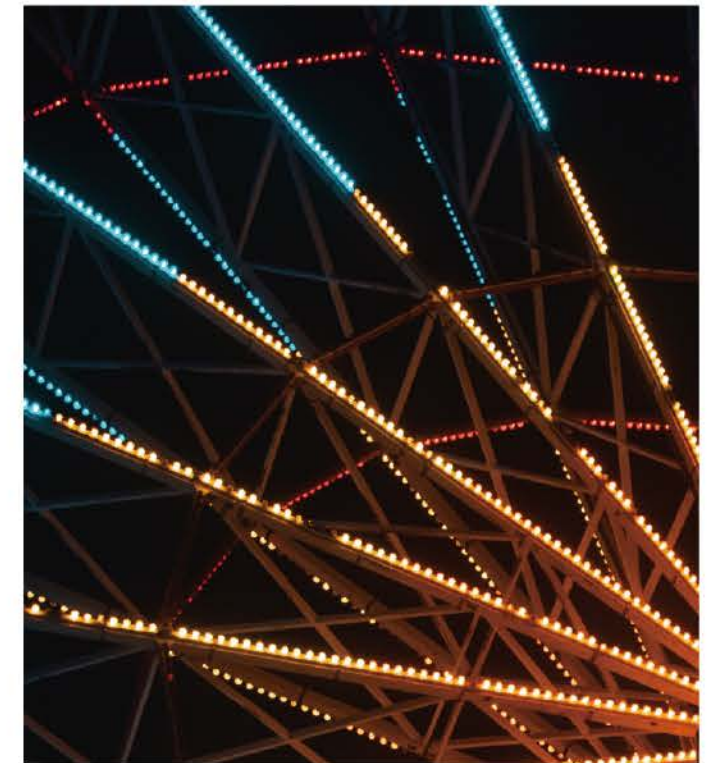

SMD RGB+IC	23
PLCC RGB+IC	23




Top View

- Control Panel
- Back Light
- Indicator
- LED Lighting
- IoT Application
- Medical Application



0402 (LC292) Series


Outline Dimensions 1.0 x 0.5 x 0.3 mm

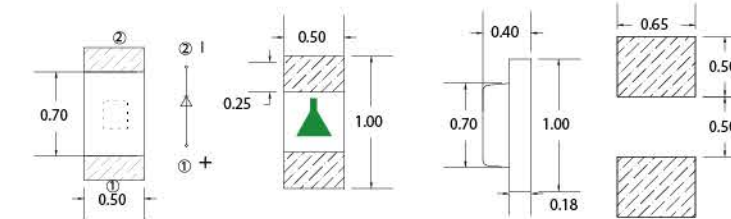

Part No.	Color	Wavelength λ_d (nm)/ CIE (x,y)	Lens Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LC292LBCT-5A-YY	Blue	470	Water Clear	70	120	2.8	5
LC292LGCT-YY	Green	519	Water Clear	250	120	2.9	5
LC292JGCT-YY	Yellow Green	572	Water Clear	34	120	2.0	20
LC292JYCT-YY-U1	Yellow	590	Water Clear	100	120	2.0	20
LC292JFCT-YY	Orange	604	Water Clear	100	120	2.0	20
LC292QRCT-YY	Super Red	624	Water Clear	145	120	2.1	20
LC292WDT-5A-YY	White	(0.25, 0.245)	Yellow Diffused	250	130	2.7	5

0603 (LC191) Series


Outline Dimensions 1.6 x 0.8 x 0.4 mm

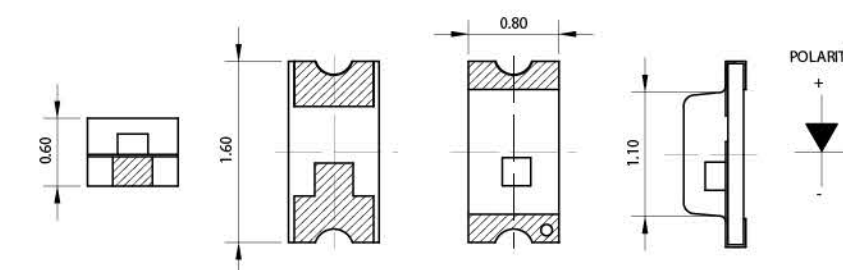

Part No.	Color	Wavelength λ_d (nm)/ CIE (x,y)	Lens Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LC191LBCT	Blue	470	Water Clear	100	130	3.0	20
LC191LGCT	Green	525	Water Clear	700	130	3.1	20
LC191JGCT	Yellow Green	570	Water Clear	30	130	2.1	20
LC191JYCT	Yellow	590	Water Clear	100	130	2.1	20
LC191JFCT	Orange	605	Water Clear	50	130	1.85	5
LC191JRCT	Super Red	631	Water Clear	50	130	2.0	20
LC191WDT-5mA	White	(0.28, 0.28)	Yellow Diffused	280	130	2.7	5

0603 (LC292) Series


Outline Dimensions 1.6 x 0.8 x 0.4 mm

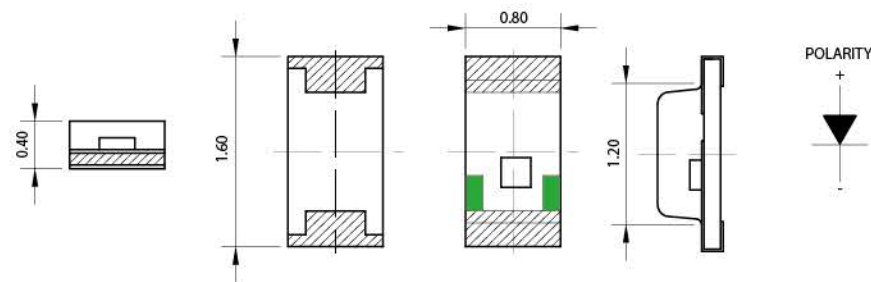

Part No.	Color	Wavelength λ_d (nm)/ CIE (x,y)	Lens Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LC192LBCT	Blue	470	Water Clear	100	130	3.2	20
LC192LGCT	Green	525	Water Clear	300	130	3.0	20
LC192JGCT-5A	Yellow Green	569	Water Clear	10	130	2.0	5
LC192JYCT	Yellow	590	Water Clear	80	130	2.1	20
LC192KFCT	Orange	605	Water Clear	100	130	2.0	20
LC192JRCT-5AK1	Super Red	631	Water Clear	28	130	1.9	5
LC192WDT	White	(0.30, 0.30)	Yellow Diffused	150	130	2.8	5

0603 (LC192C) Series


Outline Dimensions 1.6 x 0.8 x 0.4 mm

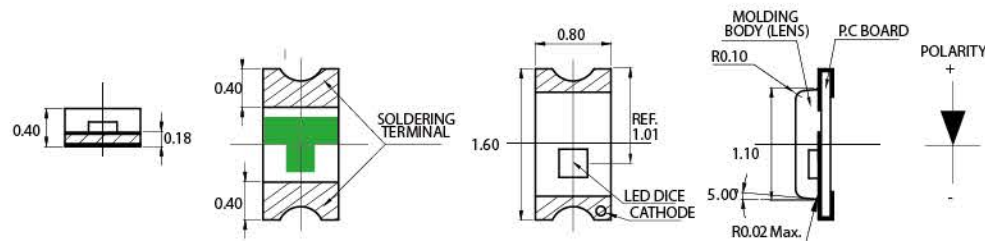

Part No.	Color	Wavelength λ_d (nm)/ CIE (x,y)	Lens Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LC192CBCT-5A	Blue	470	Water Clear	30	130	2.8	5
LC192CGCT-5A	Yellow Green	571	Water Clear	10	130	2.0	5
LC192CYCT-5A	Yellow	590	Water Clear	38	130	2.2	5
LC192CFCT-5A	Orange	605	Water Clear	38	130	1.8	5
LC192CRCT-5A	Super Red	631	Water Clear	12	130	1.9	5
LC192CWDT-HM	White	(0.30, 0.27)	Yellow Diffused	130	130	2.9	5

0805 (LC170) Series


Outline Dimensions 2.0 x 1.25 x 0.8 mm

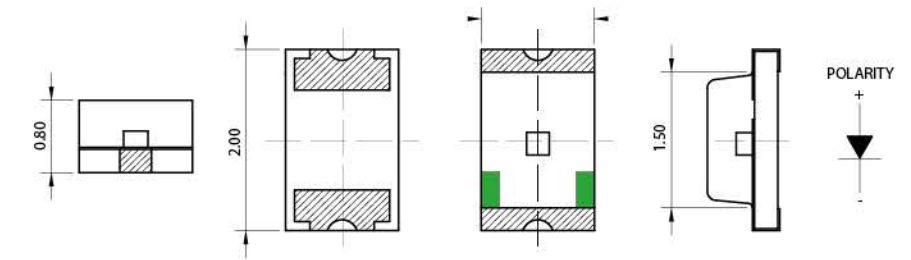

Part No.	Color	Wavelength λ_d (nm)/ CIE (x,y)	Lens Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LC170LBCT	Blue	470	Water Clear	100	130	3.2	20
LC170LGCT	Green	525	Water Clear	300	130	3.1	20
LC170JGCT	Yellow Green	570	Water Clear	40	130	2.1	20
LC170JYCT	Yellow	590	Water Clear	70	130	2.1	20
LC170JFCT	Orange	605	Water Clear	80	130	2.0	20
LC170JRCT	Super Red	630	Water Clear	60	130	1.9	20
LC170WDT	White	(0.30, 0.30)	Yellow Diffused	500	130	3.1	20

1206 (LC150) Series


Outline Dimensions 3.2 x 1.6 x 1.1 mm

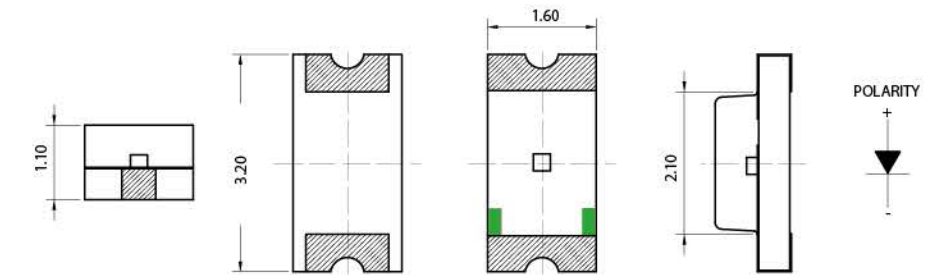

Part No.	Color	Wavelength λ_d (nm)/ CIE (x,y)	Lens Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LC150LBCT	Blue	470	Water Clear	120	130	3.3	20
LC150LGCT	Green	525	Water Clear	300	130	3.1	20
LC150JGCT	Yellow Green	570	Water Clear	40	130	2.1	20
LC150JYCT	Yellow	590	Water Clear	80	130	2.1	20
LC150JFCT	Orange	605	Water Clear	71	130	2.0	20
LC150JRCT	Super Red	631	Water Clear	71	130	1.9	20
LC150WDT	White	(0.275, 0.268)	Yellow Diffused	1000	130	3.0	20

0603 (LC19D) Dome Lens Series


Outline Dimensions 1.6 x 0.8 x 0.95 mm

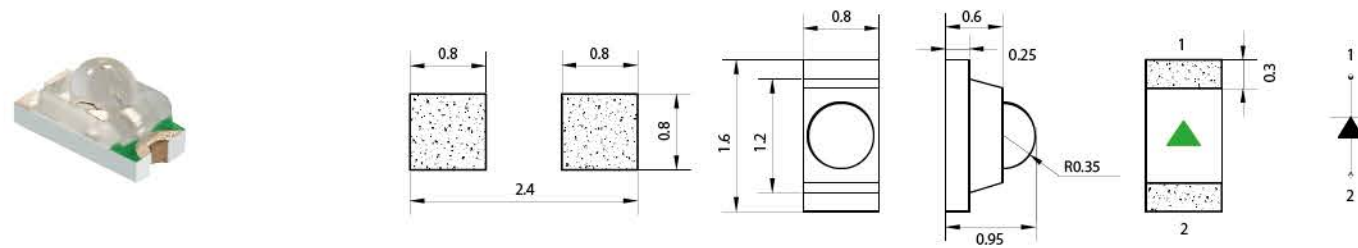

Part No.	Color	Wavelength λ_d (nm)/ CIE (x,y)	Lens Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LC19DLBCT-2mA-XG	Blue	469	Water Clear	80	60	2.6	2
LC19DLGCT-2mA-XG	Green	530	Water Clear	310	60	2.5	2
LC19DGGCT-2mA-XG	Yellow Green	571	Water Clear	20	60	1.9	2
LC19DJYCT-2mA-XG	Yellow	593	Water Clear	60	60	1.9	2
LC19DJECT-2mA-XG	Orange	606	Water Clear	80	60	1.9	2
LC19DJRCT-2mA-XG	Red	623	Water Clear	80	60	1.9	2
LC19DLBCT-XG	Blue	433	Water Clear	430	60	3.0	20
LC19DLGCT-XG	Green	525	Water Clear	1500	60	3.0	20
LC19DKGCT-XG	Yellow Green	571	Water Clear	200	60	2.0	20
LC19DKYCT-XG	Yellow	593	Water Clear	500	60	2.0	20
LC19DJECT-XG	Orange	605	Water Clear	440	60	2.0	20
LC19DJRCT-XG	Red	624	Water Clear	440	60	2.0	20

1206 (LC153C) Dome Lens Series


Outline Dimensions 3.2 x 1.6 x 2.0 mm

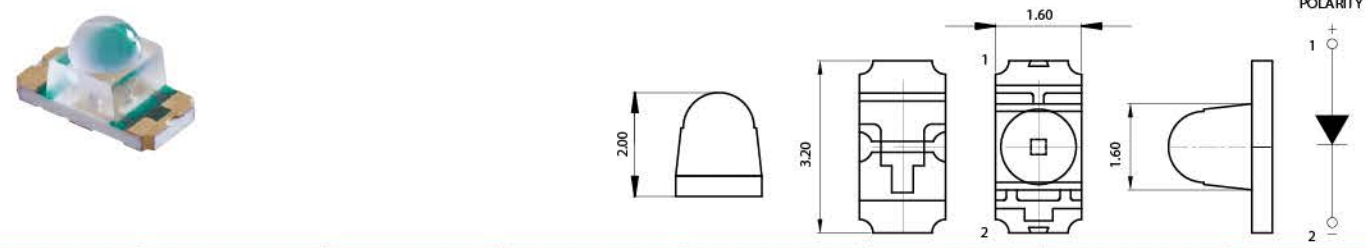

Part No.	Color	Wavelength λ_d (nm)/ CIE (x,y)	Lens Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LC153LBCT-HD	Blue	470	Water Clear	2850	15	3.0	20
LC153LGCT-HD	Green	520	Water Clear	5700	15	3.0	20
LC153KGCT-HD-U1	Yellow Green	571.5	Water Clear	900	15	2.15	20
LC153KYCT-HD	Yellow	591.5	Water Clear	2250	15	2.15	20
LC153KRCT-HD-U1	Super Red	635.5	Water Clear	2850	15	2.15	20

0603 (LC295) Dual Color Series


Outline Dimensions 1.6 x 0.8 x 0.6 mm

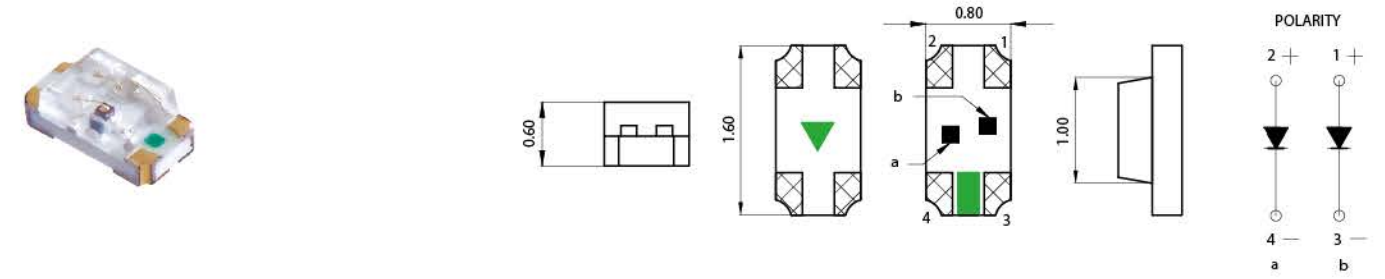

Part No.	Color	Wavelength λ_d (nm)/ CIE (x,y)	Lens Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LC295JRGCT	Super Red Yellow Green	630 567	Water Clear	47.5 20.5	130	1.9 2.0	20
LC295JYGCT	Yellow Yellow Green	590 570	Water Clear	72 45	130	1.9 2.0	20
LC295KYLGCT-BIC-5A	Green Yellow	525 590	Water Clear	250 30	130	2.6 1.9	5
LC295JRLBCT	Super Red Blue	631 470	Water Clear	60 160	130	2.0 3.1	20
LC295JRWD-5A	Super Red White	630 (0.325, 0.300)	Yellow Diffused	14 72	130	1.8 2.9	20

0605 (LC195) Dual Color Series


Outline Dimensions 1.6 x 1.5 x 0.55 mm

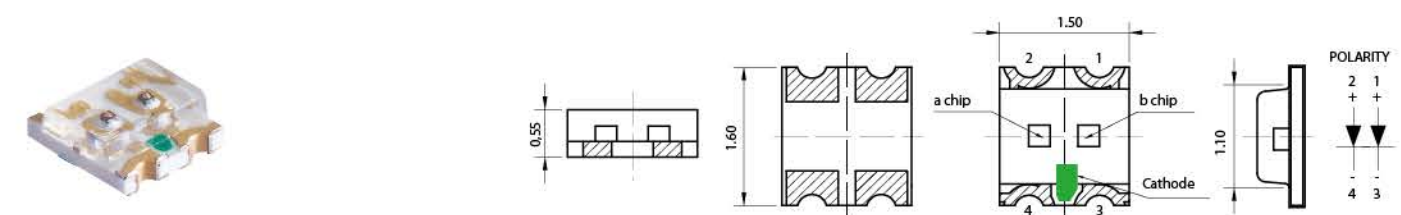

Part No.	Color	Wavelength λ_d (nm)/ CIE (x,y)	Lens Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LC195JRGCT	Super Red Yellow Green	631 570	Water Clear	100 30	130	1.9 1.9	20
LC195JGYCT	Yellow Green Yellow	572 590	Water Clear	27 90	130	2.0 2.0	20
LC195JYGCT	Yellow Yellow Green	590 570	Water Clear	35 18	130	2.0 2.0	20
LC195JRLBCT	Super Red Blue	631 470	Water Clear	40 140	130	2.0 3.0	20
LC195JRLGCT-5A-FMT	Super Red Green	631 525	Water Clear	17 280	130	1.9 2.7	5
LC195JRWD-5A	Super Red White	630 (0.29, 0.28)	Yellow Diffused	18 112	130	2.0 2.9	5

1206 (LC155) Dual Color Series


Outline Dimensions 3.2 x 2.7 x 1.1 mm

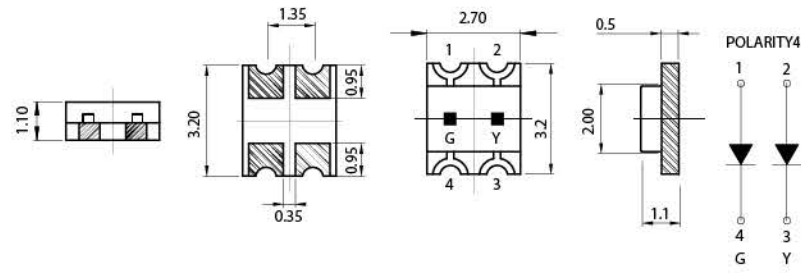

Part No.	Color	Wavelength λ_d (nm)/ CIE (x,y)	Lens Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LC155LBJECT-HD	Blue	468	Water Clear	200	120	3.1	20
	Orange Red	624		2.1			
LC155JRJGCT-HD	Super Red	570	Water Clear	130	120	2.0	20
	Yellow Green	624		2.0			

1206 (LC15F) RGB Series


Outline Dimensions 3.2 x 1.25 x 1.1 mm

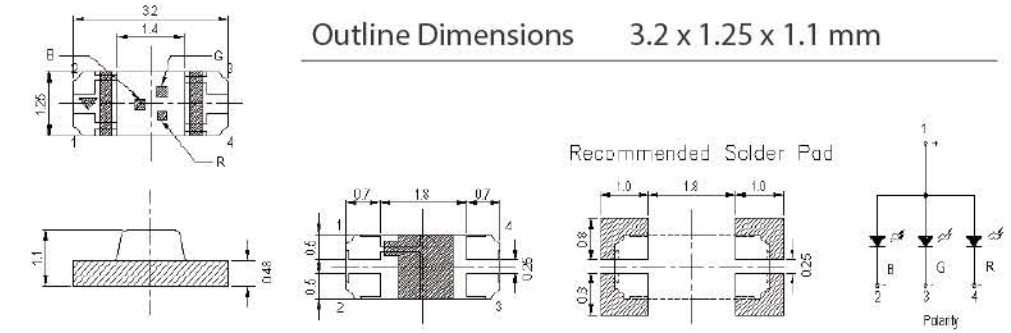

Part No.	Color	Wavelength λ_d (nm)/ CIE (x,y)	Lens Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LC15F1RGBCT-HD	Super Red	624	Water Clear	180	120	2.0	20
	Green	525		3.1			
	Blue	465		3.1			

0606 (LC19F) RGB Series


Outline Dimensions 1.6 x 1.6 x 0.6 mm

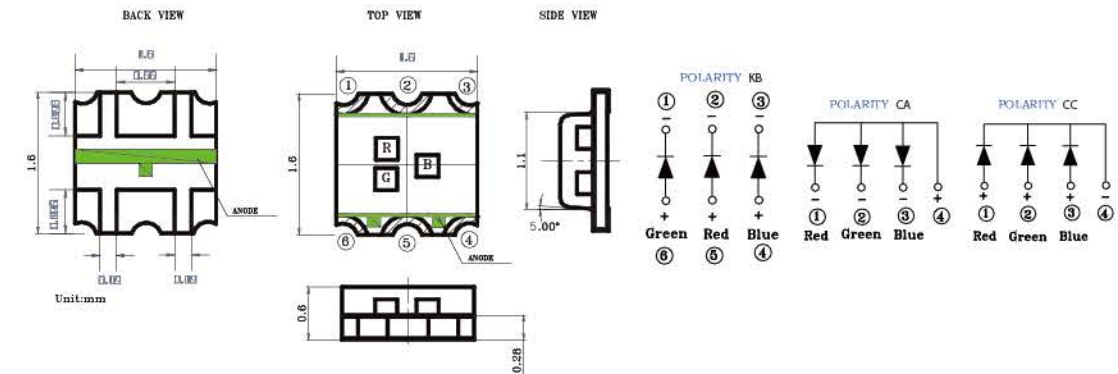

Part No.	Color	Wavelength λ_d (nm)/ CIE (x,y)	Lens Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LC19F1RGBCT-KB	Super Red	621	Water Clear	36	130	1.9	2
	Green	532		2.3			
	Blue	467		2.6			
LC19F1RGBCT-CA	Super Red	623	Water Clear	112	130	1.9	20
	Green	525		3.1			
	Blue	470		3.0			
LC19F1RGBCT-CC	Super Red	623	Water Clear	320	130	2.0	20
	Green	525		3.1			
	Blue	470		3.1			

3020 (LT650WDT) PLCC White Series


Outline Dimensions 3.0 x 2.0 x 1.3 mm

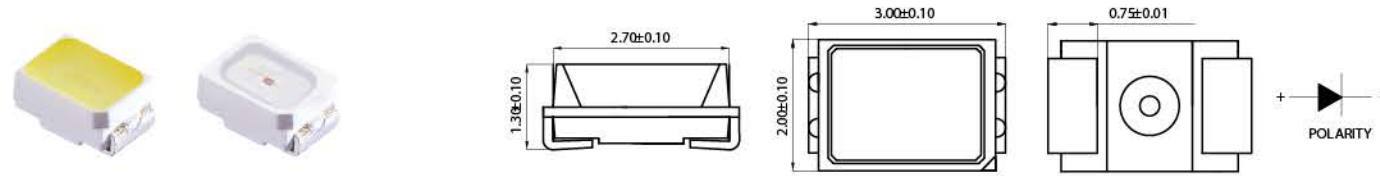

Part No.	Color	Wavelength λ_d (nm)/ CIE (x,y)	Lens Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LT650WDT	White	7000 ~ 9000	Yellow Diffused	3050	120	3.5	20
LT650WDT-NW	White	4000 ~ 5000	Yellow Diffused	2000	120	3	20
LT650WDT-WW	White	2500 ~ 3000	Yellow Diffused	1800	120	3	20

2835 (LT2835WDT) PLCC White Series


Outline Dimensions 2.8 x 3.5 x 0.8 mm

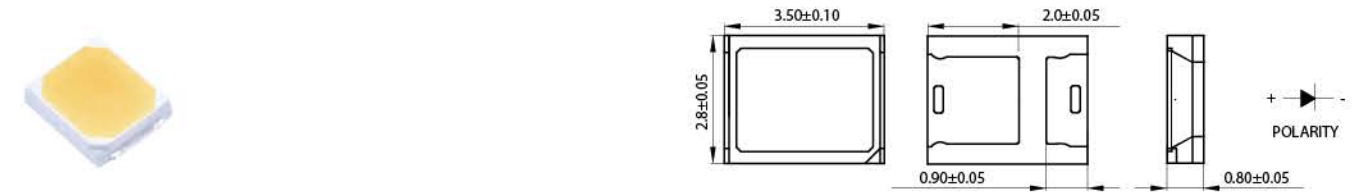

Part No.	Color	Wavelength λ_d (nm)/ CIE (x,y)	Lens Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LT2835WDT-CW	White	7000 ~ 9000	Yellow Diffused	650	120	3	60
LT2835WDT-NW	White	4000 ~ 5000	Yellow Diffused	6800	120	3	60
LT2835WDT-WW	White	2500 ~ 3000	Yellow Diffused	6200	120	3	60
LT2835WDT-CW	White	7000 ~ 9000	Yellow Diffused	6500	120	3	150
LT2835WDT-NW	White	4000 ~ 5000	Yellow Diffused	6800	120	3	150
LT2835WDT-WW	White	2500 ~ 3000	Yellow Diffused	620	120	3	150

3528 (LT670WDT) PLCC White Series


Outline Dimensions 3.5 x 2.8 x 1.9 mm

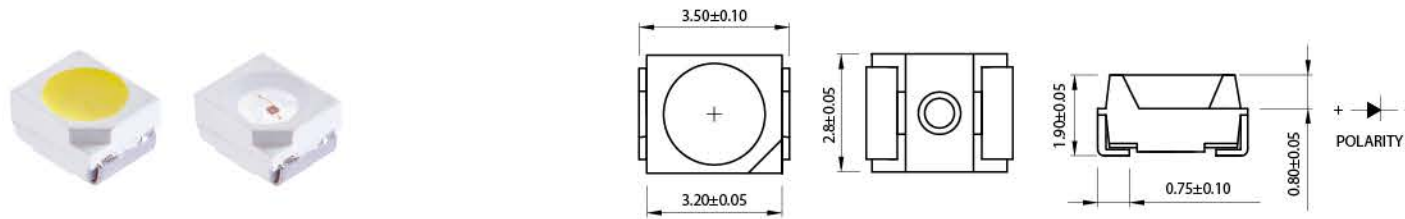

Part No.	Color	Wavelength λ_d (nm)/ CIE (x,y)	Lens Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LT670WDT-CW	White	7000 ~ 9000	Yellow Diffused	2500	120	3	20
LT670WDT-NW	White	6000 ~ 7000	Yellow Diffused	2400	120	3	20
LT670WDT-WW	White	2400 ~ 3800	Yellow Diffused	9500	30	3	20

3014 (LT3014WDT) PLCC White Series


Outline Dimensions 3.0 x 1.4 x 0.7 mm

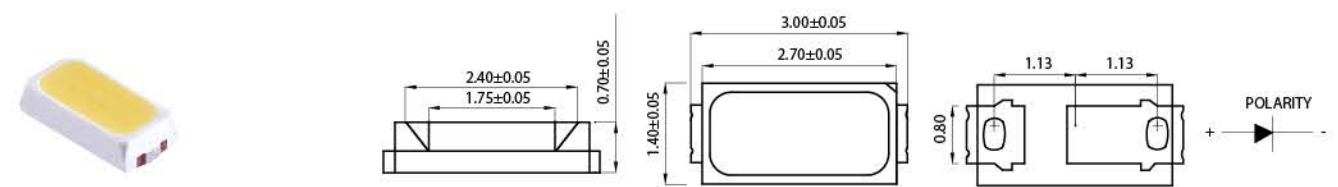

Part No.	Color	Wavelength λ_d (nm)/ CIE (x,y)	Lens Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LT3014CWDT	White	5500 ~ 6500	Yellow Diffused	3000	120	3	20
LT3014NWDT	White	4000 ~ 5000	Yellow Diffused	3400	120	3	20
LT3014WWDT	White	2850 ~ 3250	Yellow Diffused	3200	120	3	20

3528 (LT670) PLCC Single Color Series


Outline Dimensions 3.5 x 2.8 x 1.9 mm

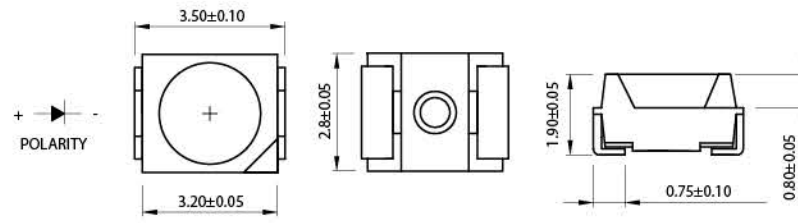

Part No.	Color	Wavelength λd(nm)/ CIE (x,y)	Lens Type	Typ. Luminous Intensity I _v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V _F (V)	Forward Current I _F (mA)
LT670LBCT	Blue	470	Water Clear	480	120	3	20
LT670LGCT	Green	520	Water Clear	1500	120	2.9	20
LT670KGCT	Yellow Green	570	Water Clear	100	120	2	20
LT670TYCT	Yellow	590	Water Clear	715	120	2.0	20
LT670KFCT	Orange	605	Water Clear	190	120	2.0	20
LT670KRCT	Super Red	630	Water Clear	100	120	2.0	20

3528 (LT670) PLCC Single Color Series


Outline Dimensions 3.5 x 2.8 x 1.9 mm

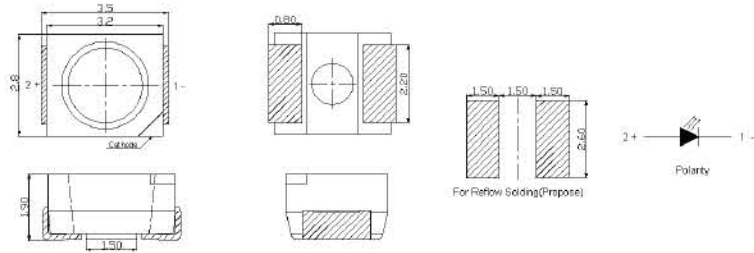

Part No.	Color	Wavelength λd(nm)/ CIE (x,y)	Lens Type	Typ. Luminous Intensity I _v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V _F (V)	Forward Current I _F (mA)
LT670KRCT-BKS	Red	625	Water Clear	850	120	2.0	20
LT670LBCT-BKS	Blue	470	Water Clear	1500	120	3.4	20
LT670LGCT-BKS	Pure Green	525	Water Clear	2000	120	3.4	20

3528 (LT67FRGBCT) PLCC RGB Series


Outline Dimensions 3.5 x 2.8 x 1.9 mm

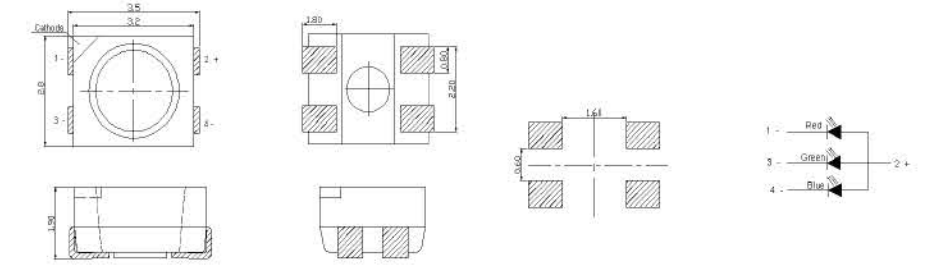

Part No.	Color	Wavelength λd(nm)/ CIE (x,y)	Lens Type	Typ. Luminous Intensity I _v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V _F (V)	Forward Current I _F (mA)
LT67FRGBCT-4PIN-BKS	Red	630	Water Clear	700	120	2.0	20
	Green	525		3.0		20	
	Blue	475		3.0		20	

3528 (LT67FRGBCT) PLCC RGB Series


Outline Dimensions 3.5 x 2.8 x 1.8 mm

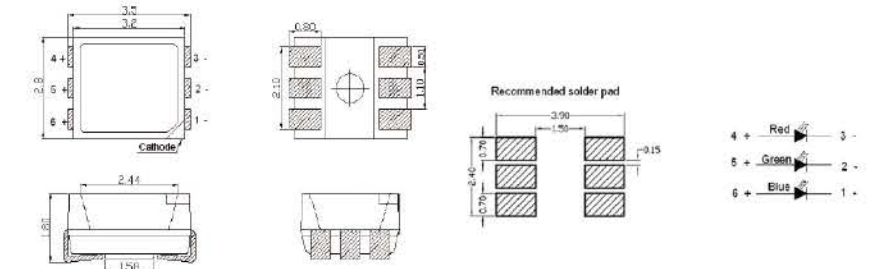

Part No.	Color	Wavelength λd(nm)/ CIE (x,y)	Lens Type	Typ. Luminous Intensity I _v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V _F (V)	Forward Current I _F (mA)
LT67FRGBCT-BKS	Red	630	Water Clear	954	120	2.4	20
	Green	535		3.4		20	
	Blue	470		3.4		20	

5050 (LT69FRGB) PLCC RGB Series


Outline Dimensions 5.4 × 5.0 × 1.5 mm

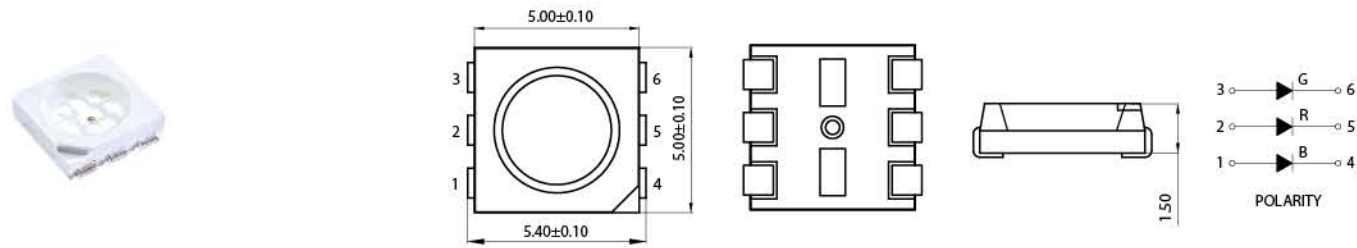

Part No.	Color	Wavelength λ_d (nm)/ CIE (x,y)	Lens Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LT69FRGBCT	Super Red	628	Water Clear	500	120	2.0	20
	Green	525		3.0			
	Blue	465		3.0			
LT69FRGBCT-0.5W-S2	Super Red	628	Water Clear	1900	120	2.0	50
	Green	525		3.1			
	Blue	465		3.1			
LT69FRGBCT-1.5W-S2	Super Red	628	Water Clear	6000	120	2.1	150
	Green	525		3.2			
	Blue	465		3.2			

LS020GRBCT PLCC RGB Series


Outline Dimensions 0.7 × 4.5 × 1.0 mm

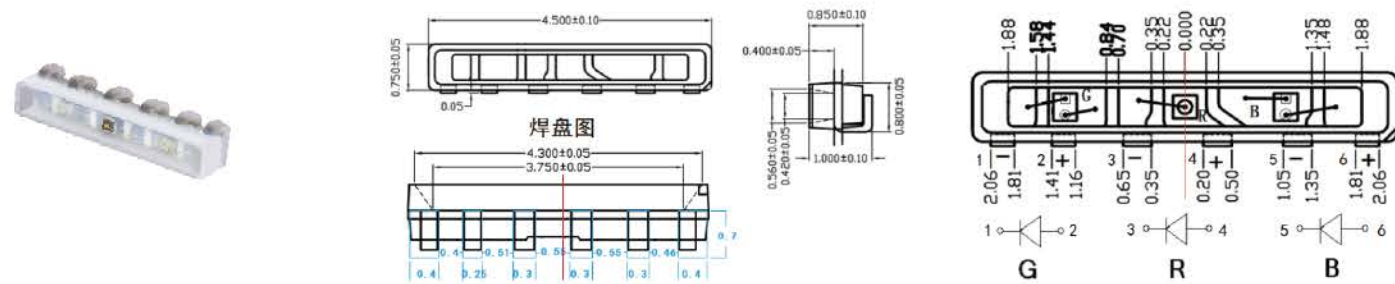

Part No.	Color	Wavelength λ_d (nm)/ CIE (x,y)	Lens Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LS020GRBCT-HH	Red	622	Water Clear	600	120	2.0	20
	Green	520		3.0			
	Blue	469		3.0			

2835 (LT2835IR) PLCC IR Series


Outline Dimensions 2.8 × 3.5 × 0.7 mm

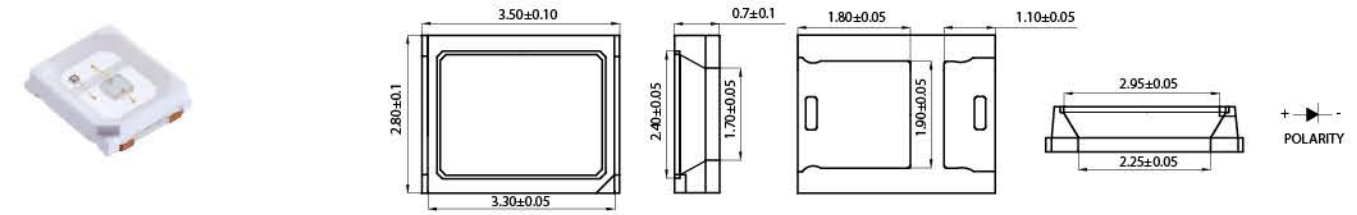

Part No.	Color	Wavelength λ_d (nm)/ CIE (x,y)	Lens Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LT2835IR4CT-20	IR	850	Water Clear	250	130	1.6	250
LT2835IR4CT-24	IR	850	Water Clear	350	130	1.6	150

2835 (LT2835IR) PLCC IR Series

Outline Dimensions 2.8 × 3.5 mm

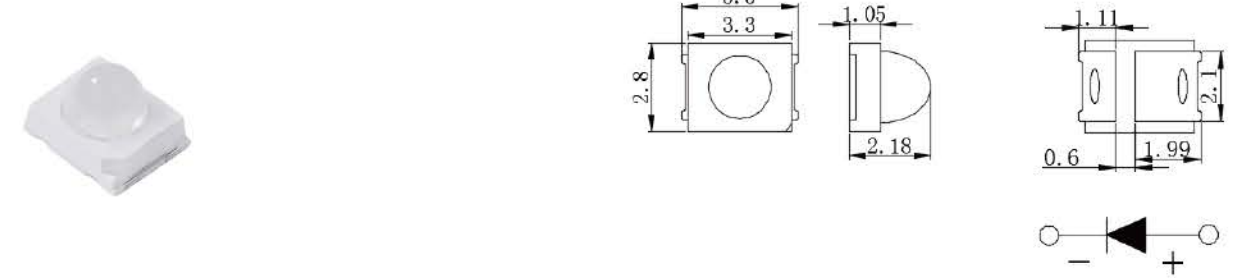

Part No.	Color	Wavelength λ_d (nm)/ CIE (x,y)	Lens Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LT2835IR4CT-30	IR	850	Water Clear	150	30	1.5	150
LT2835IR4CT-60	IR	850	Water Clear	150	60	1.5	150
LT2835IR4CT-90	IR	850	Water Clear	80	90	1.5	150




Side View

- Control Panel
- Back Light
- Indicator
- LED Lighting
- IoT Application
- Medical Application



0603 (LS193) Series


Outline Dimensions 1.6 X 0.75 x 1.1 mm

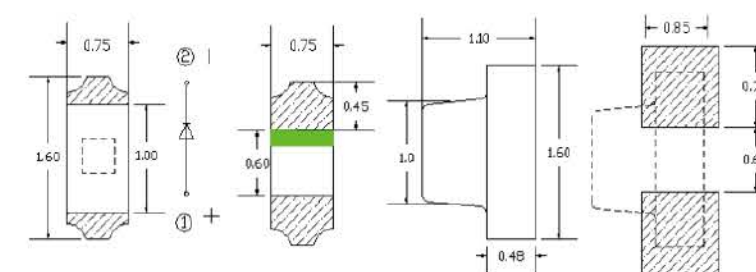

Part No.	Color	Wavelength λ_d (nm)/ CIE (x,y)	Lens Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LS193TBCT-YY	Blue	466	Water Clear	58	120	2.9	5
LS193LGCT-YY	Green	522	Water Clear	250	120	2.9	5
LS193JGCT-YY	Yellow Green	571	Water Clear	34	130	2.1	20
LS193JYCT-R-YY	Yellow	590	Water Clear	120	120	2.1	20
LS193JFCT-YY	Orange	602	Water Clear	120	120	2.1	20
LS193JRCT-YY	Super Red	624	Water Clear	145	120	2.1	20
LS193WDT-2A-YY	White	(0.248 0.22)	Yellow Diffused	100	120	2.8	2

1204 (LS110) Series


Outline Dimensions 3.2 x 1.0 x 1.5 mm

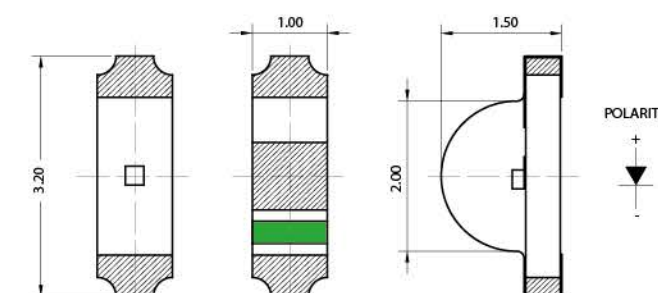

Part No.	Color	Wavelength λ_d (nm)/ CIE (x,y)	Lens Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LS110LBCT	Blue	470	Water Clear	120	130	3.2	20
LS110LGCT	Green	525	Water Clear	300	130	3.1	20
LS110JGCT	Yellow Green	570	Water Clear	50	130	2.05	20
LS110JYCT	Yellow	590	Water Clear	70	120	2.05	20
LS110JFCT	Orange	605	Water Clear	112	130	2.0	20
LS110JRCT	Super Red	631	Water Clear	60	130	1.9	20
LS110WDT-LCFC	White	(0.27, 0.26)	Yellow Diffused	80	130	2.8	5

1204 (LS115) Dual Color Series


Outline Dimensions 3.2 x 1.0 x 1.5 mm

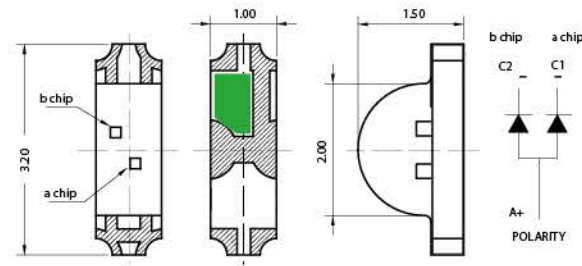

Part No.	Color	Wavelength λ_d (nm)/ CIE (x,y)	Lens Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LS115JRJGCT-5A	● Super Red	630	Water Clear	15	130	1.9	5
	● Yellow Green	570		8		2.0	
LS115JFLGCT	● Orange	605	Water Clear	100	130	2.0	20
	● Green	525		600		3.1	
LS115JFJGCT	● Orange	605	Water Clear	112	130	2.0	20
	● Yellow Green	570		28		2.0	
LS115KFLBCT	● Orange	605	Water Clear	180	130	2.0	20
	● Blue	470		150		3.0	
LS115JFWDT-LCFC	● Orange	605	Yellow Diffused	18	130	2.0	5
	● White	(0.26, 0.24)		80		2.8	

1204 (LS11F) RGB Series


Outline Dimensions 3.2 x 1.0 x 1.5 mm

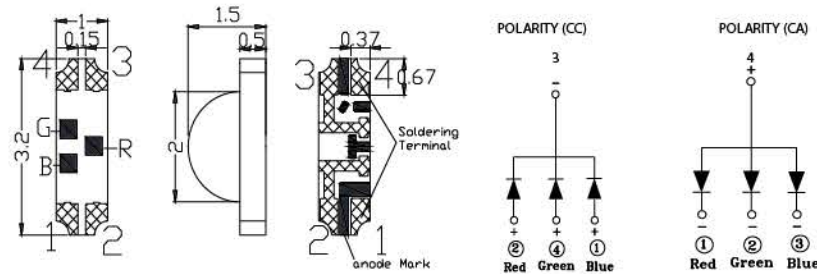

Part No.	Color	Wavelength λ_d (nm)/ CIE (x,y)	Lens Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LS11F1RGBCT-CC	● Super Red	623	Water Clear	180	130	1.9	10
	● Green	525		450		3.1	
	● Blue	470		112		3.1	
LS11F1RGBCT-CA-XM	● Super Red	623	Water Clear	180	130	2.0	20
	● Green	520		900		3.1	
	● Blue	465		180		3.1	

LS020WDT PLCC White Series


Outline Dimensions 3.5 x 1.0 x 0.9mm

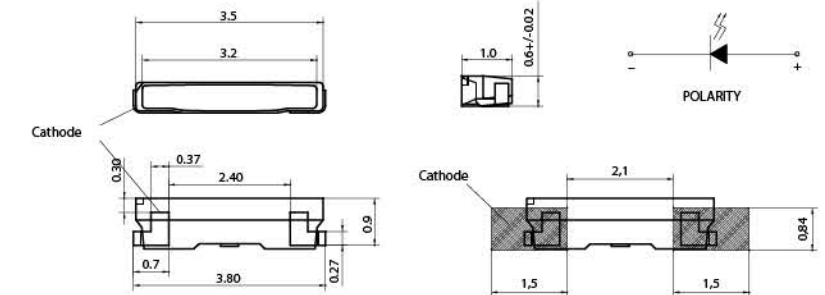

Part No.	Color	Wavelength λ_d (nm)/ CIE (x,y)	Lens Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LS020WDT	● White	6500 ~ 7500	Yellow Diffused	3000	110	3.0	20
LS020WWDT	● White	2000 ~ 3000	Yellow Diffused	2500	120	3.0	20

LS2812WDT PLCC White Series

Outline Dimensions 2.8 x 0.8 x 1.2mm

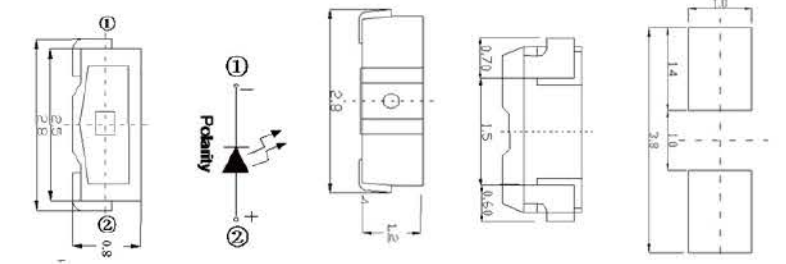

Part No.	Color	Wavelength λ_d (nm)/ CIE (x,y)	Lens Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LS2812WDT	● White	0.29, 0.29	Yellow Diffused	1600	120	5	20
LS2812HECT	● Red	630	Yellow Diffused	140	120	5	20
LS2812LGCT	● Green	521	Yellow Diffused	720	120	5	20
LS2812KYCT	● Yellow	592	Yellow Diffused	180	120	5	20
LS2812LBCT	● Blue	472	Yellow Diffused	230	110	3	20




RGB+IC

- Control Panel
- Back Light
- Indicator
- LED Lighting
- IoT Application
- Medical Application



SMD RGB+IC


Outline Dimensions 1.6 X 0.75 x 1.1 mm

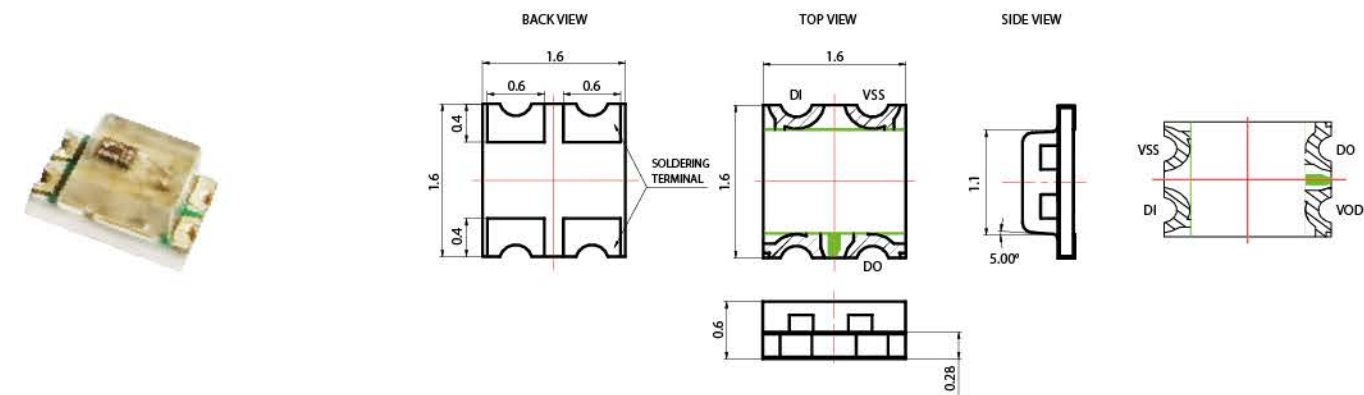

Part No.	Color	Wavelength λ_d (nm)/ CIE (x,y)	Lens Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LC19F1GRBWT-IC	● Super Red	620	Water Clear	120	-	5	5
	● Green	530		200			
	● Blue	470		60			

PLCC RGB+IC

Outline Dimensions 3.2 x 1.0 x 1.5 mm

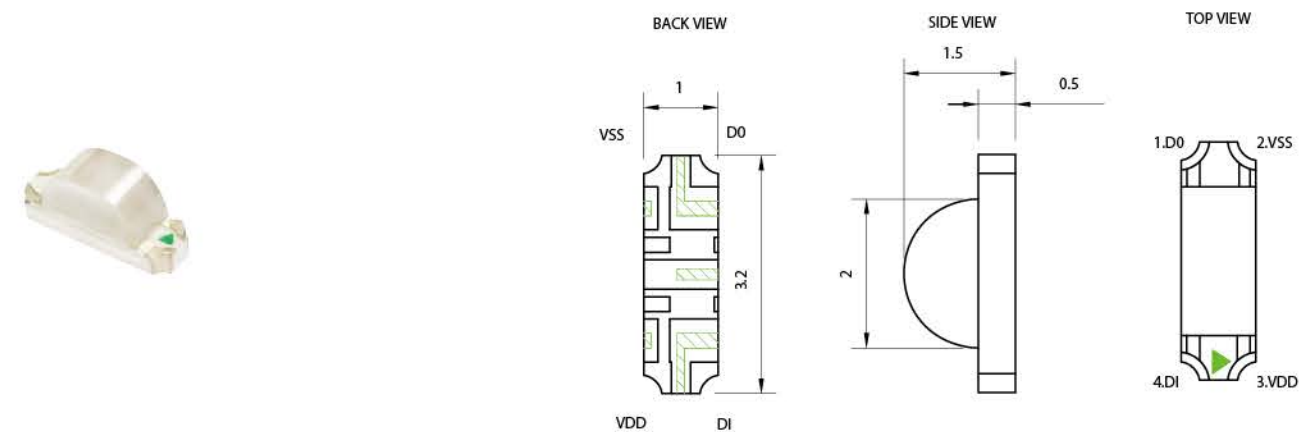

Part No.	Color	Wavelength λ_d (nm)/ CIE (x,y)	Lens Type	Typ. Luminous Intensity I_v (mcd)	Viewing Angle (deg.)	Typ. Forward Voltage V_F (V)	Forward Current I_F (mA)
LS11F1GRBWT-IC	● Super Red	620	White Diffused	80	-	5	5
	● Green	530		120			
	● Blue	470		25			



► Headquarters

光鼎電子股份有限公司
Para Light Electronics Co., Ltd.

新北市中和區建康路8號11樓
11F, No. 8, Jiankang Rd., Zhonghe Dist. New Taipei City, 23586 Taiwan
T+886-2-2225-3733
F+886-2-2225-4800
para@para.com.tw
www.para.com.tw

► Factory

連雲港光鼎電子有限公司
Para Light Lianyungang Electronics Co., Ltd.

中國江蘇省連雲港市灌南線經濟開發區威海路8號
No.8, Wei Hai Rd., Guannan Economics Deveopment Zone,
Lianyungang City, Jiangsu Province, 223500, China
T+86-518-8369-2888
F+86-518-8369-2899
para@para.com.tw

南京華鼎電子有限公司
Para Light Nanjing Electronics Co., Ltd.

中國江蘇省南京市江寧區湯山街湯泉西路1號
No.1, Tanguan W. Rd., Tangshan Ave., Jianning Dist. Nanjing City,
Jiansu Province, 211131 China
T+86-25-8410-7685
F+86-25-8410-7684

緬甸光鼎電子有限公司(仰光)
Para Light Yangon Electronics Co., Ltd. (Myanmar)

No. 212, Pyin Si Minthar Gyi Street, Shwe Lin Ban Industry,
Hlaing Thar Yar Township, Yangon, Myanmar
T+95-9776964540
susie@parahk.com
www.para.com.tw

► America

美國光鼎分公司
Para Light Corp. USA

515 Spanish Lane, Suite B, Walnut, CA 91789
T+909-468-4866
F+909-468-4876
sales@paralightusa.com
www.paralightusa.com

► India

印度光鼎分公司
Para Light India Pvt. Ltd.

No.979, 9th Floor, Aggarwal Cyber Plaza-2,
Netaji Subhash Place, Pitampura, New Delhi- 110034, India
T+011-41086226
abhinav.jha@para.com.tw

► Greater China-Sales Team

North China : Beijing, Qingdao
East China : Shanghai, Ningbo, Suzhou, Nanjing, Hefei, Wuhan, Zhengzhou
South: Shenzhen, Xiamen, Jiangmen
Central: Chengdu

蘇州光鼎電子有限公司 East China
Para Light (SUZHOU) Electronics Co., Ltd.

蘇州新區獅山路199號新地中心2104室
Room 2104, Xindi Center Building, No.199, Shishan Road
Suzhou City, Jiangsu Province, 215011 China
T+86-133-6527-0527
F+86-512-6809-7669
jeremy@para-lyg.com.cn

光鼎深圳實業有限公司 South China
Para Light (SHENZHEN) Electronics Co., Ltd.

中國深圳市龍華區龍觀東路57號尚美時代大廈1310-1312室
Room 1310-1312, Shangmei Times Building, No.57,
Longguan East Road, Longhua Dist., Shenzhen City,
Guangdong Province, 518110 China
T+86-189-2747-1103
eddy@paralight.com.cn

青島光鼎電子有限公司
Para Light (QINGDAO) Electronics Co., Ltd.

山東省青島市市北區山東路168號時代國際廣場12樓1204室
Room 1204, 12th Floor, Times International Plaza,
No.168 Shandong Road, Shibei District, Qingdao City,
Shandong Province, 266000 China
T+0532-85692571 / 18626429477

光鼎北京辦事處 North China
Para Light (BEIJING) Sales Office

北京市海澱區清和中街橡樹灣二期
Qinghe street, oak bay Phase II building, Haiding District,
Beijing City, 100000 China
T+186-2642-9477 / 181-0107-7619
tianjin@paralight.com.cn

光鼎成都辦事處 Central China
Para Light (CHENGDU) Sales Office

四川省成都市金牛區金沙路169號-現代城1幢10層1008室
Room 1008, 10th Floor, No. 169 Xiandaicheng Building 1, Jinsha Road,
Jinniu District, Chengdu city, Sichuan Province, 610031 China
T+86-18360655305
yangfeiting@para-lyg.com.cn