

# DATA SHEET

PART NO.: LT1808WDT-CW-S60

REV: A/0

CUSTOMER'S APPROVAL: \_\_\_\_\_

DCC: \_\_\_\_\_

DRAWING NO.: DS-31P-22-0099

DATE: 2022-08-22

Page 1

LD-R/R005

# SURFACE MOUNT DEVICE LED

LT1808WDT-CW-S60

REV:A/0

## • Features

- .Top view,wide view angle,warm white color PLCC-2 package.
- .EIA STD package, packing in 8mm tape on 7" diameter reels (ANSI/EIA-481-B-2001).
- .Compatible with automatic Pick & Place equipment.
- .Compatible with IR Reflow soldering and TTW soldering.
- .Pb free product and acceptable lead-free process.
- .Moisture sensitivity level:Level 5a.
- .Meet RoHS Green Product.



**ATTENTION**  
OBSERVE PRECAUTIONS  
FOR HANDLING  
ELECTROSTATIC  
DISCHARGE  
SENSITIVE  
DEVICES


## • Applications

- .Back lighting
- .Decorative and Entertainment Lighting.
- .Signal and symbol luminaries.

## • Chip Materials

- .DiceMaterial :InGaN
- .Lens Color : Yellow Diffused

## • Package Dimensions

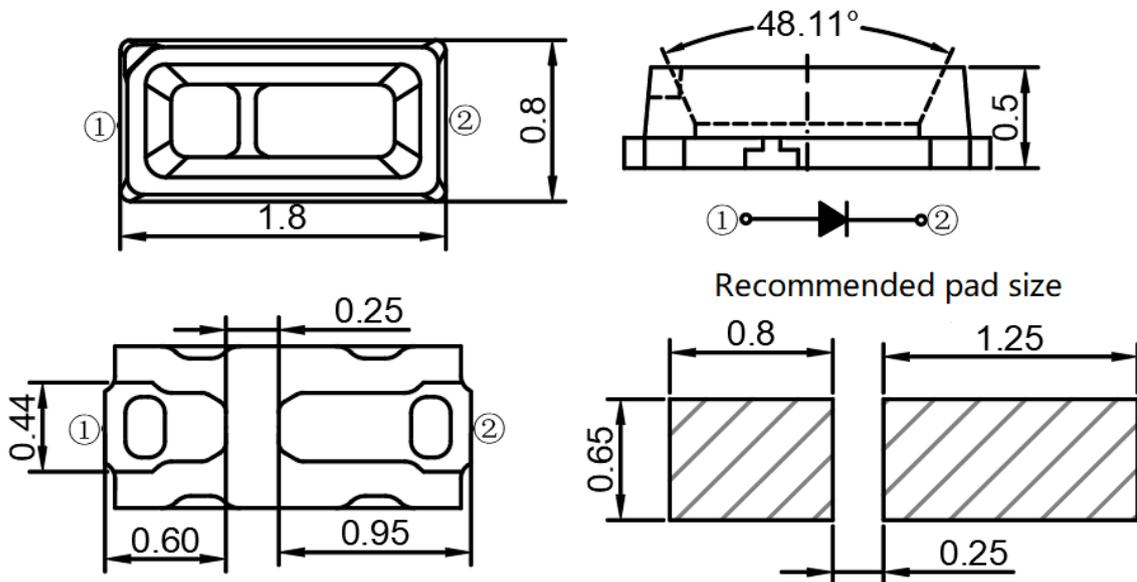

- Notes:1. All dimensions are in millimeters (inches).  
2. Tolerance is  $\pm 0.254\text{mm}$  (0.01") unless otherwise specified.

# SURFACE MOUNT DEVICE LED

LT1808WDT-CW-S60

REV:A/0

● **Electrical and optical characteristics(Ta=25°C)**

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test
Luminous Intensity	IV	1500	---	3000	mcd	IF =20mA
CIE Chromaticity	X	---	0.31	---		IF =20mA
	Y	---	0.34	---		IF =20mA
Forward Voltage	VF	2.8	---	3.1	V	IF =20mA
Reverse Current	IR	---	---	5	uA	VR=5V
Viewing Angle	2θ1/2	120			deg	---

● **Absolute Maximum Ratings At Ta=25°C**

Parameter	Symbol	Rating	Unit
Power Dissipation	Pd	100	mW
Peak Forward Current	IFP	100	mA
DC Forward Current	IF	20	mA
Reverse Voltage	VR	5	V
Electrostatic Discharge(HBM)	ESD	1500	V
Operating Temperature Range	Topr	-30°C ~ + 85°C	
Storage Temperature Range	Tstg	-40°C ~ +90°C	
Soldering Condition	Tsol	Reflow soldering : 255°C For 10 Seconds Hand soldering : 300°C For 3 Seconds	

Notes:

- 1.Luminous intensity is measured with a light sensor and filter combination that proximities the CIE eye-response curve.
- 2.θ1/2 is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
- 3.Caution in ESD :  
Static Electricity and surge damages the LED. It is recommended use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.
- 4.Major standard testing equipment by "Instrument System" Model : CAS140B Compact Array Spectrometer and "KEITHLEY" Source Meter Model : 2400.


# SURFACE MOUNT DEVICE LED

LT1808WDT-CW-S60


REV:A/0

## •Typical electro-optical characteristics curves


Relative intensity VS wavelength

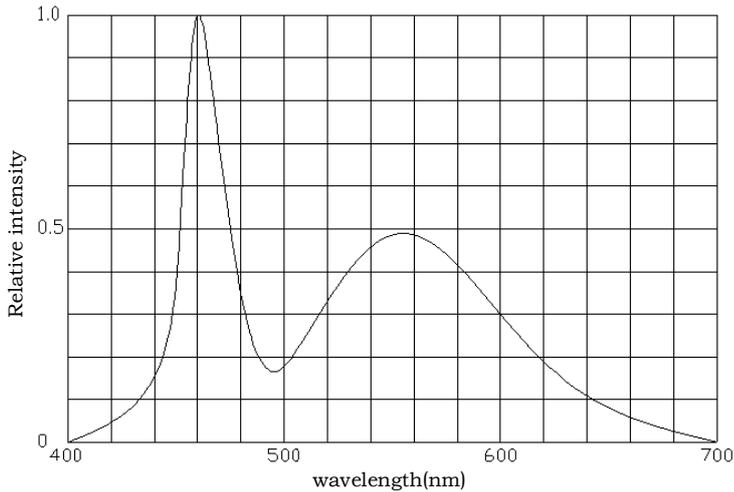


Voltage current relationship

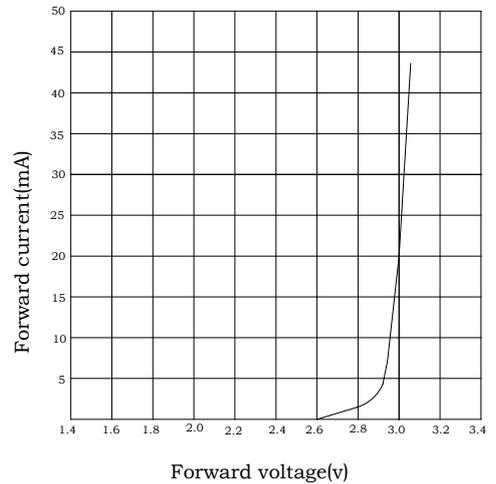


Current and ambient temperature

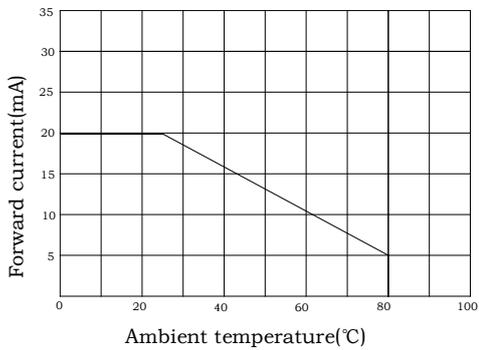


Relative light intensity vs current

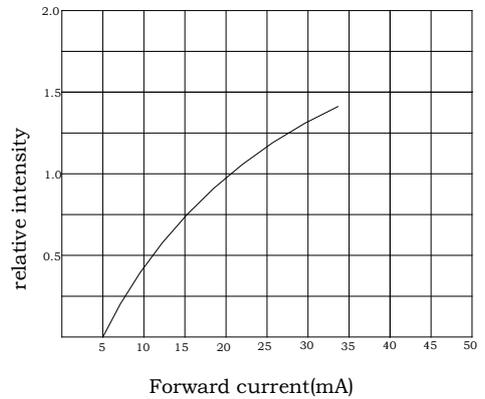

Relative light intensity vs ambient temperature

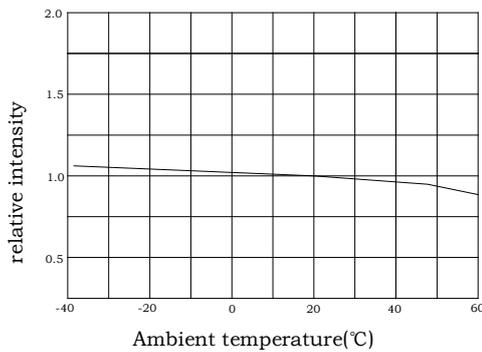

Radiation angle

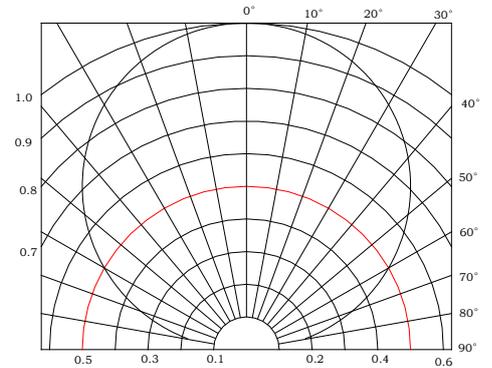

# SURFACE MOUNT DEVICE LED

LT1808WDT-CW-S60

REV:A/0


## •Bin Code List

Forward Voltage @IF=20mA		Unit : V	
Symbol	Min.	Max.	
VF	2.8	2.9	
	2.9	3.0	
	3.0	3.1	

Note:Tolerance for each Forward Voltage Bin is  $\pm 0.1V$ .

Luminous Intensity @IF=20mA		Unit : mcd	
Symbol	Min.	Max.	
IV	1500	2000	
	2000	3000	

Note:Tolerance for each Luminous Flux Bin is  $\pm 10\%$ .

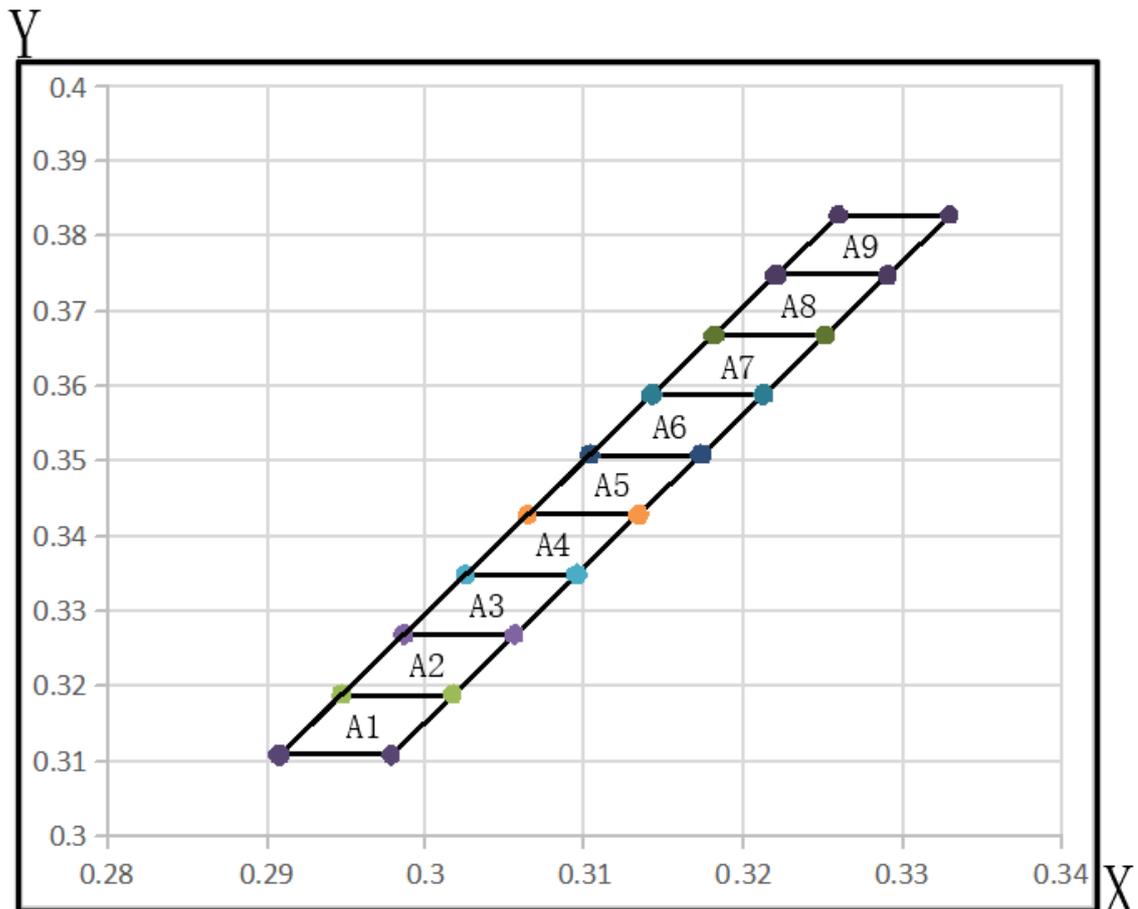

# SURFACE MOUNT DEVICE LED

LT1808WDT-CW-S60

REV:A/0

CODE	X1	Y1	X2	Y2	X3	Y3	X4	Y4
A1	0.2908	0.3109	0.2947	0.3189	0.3017	0.3189	0.2978	0.3109
A2	0.2947	0.3189	0.2986	0.3269	0.3056	0.3269	0.3017	0.3189
A3	0.2986	0.3269	0.3025	0.3349	0.3095	0.3349	0.3056	0.3269
A4	0.3025	0.3349	0.3064	0.3429	0.3134	0.3429	0.3095	0.3349
A5	0.3064	0.3429	0.3103	0.3509	0.3173	0.3509	0.3134	0.3429
A6	0.3103	0.3509	0.3142	0.3589	0.3212	0.3589	0.3173	0.3509
A7	0.3142	0.3589	0.3181	0.3669	0.3251	0.3669	0.3212	0.3589
A8	0.3181	0.3669	0.322	0.3749	0.329	0.3749	0.3251	0.3669
A9	0.322	0.3749	0.3259	0.3829	0.3329	0.3829	0.329	0.3749

Note:Tolerance for Bin is  $\pm 0.005$ .

# SURFACE MOUNT DEVICE LED

LT1808WDT-CW-S60

REV:A/0

## ●Label Explanation




ITEM CODE:PARA LIGHT

PART NO: LT1808WDT-CW-S60

LOT NO: Batch number

## ●Reel Dimensions

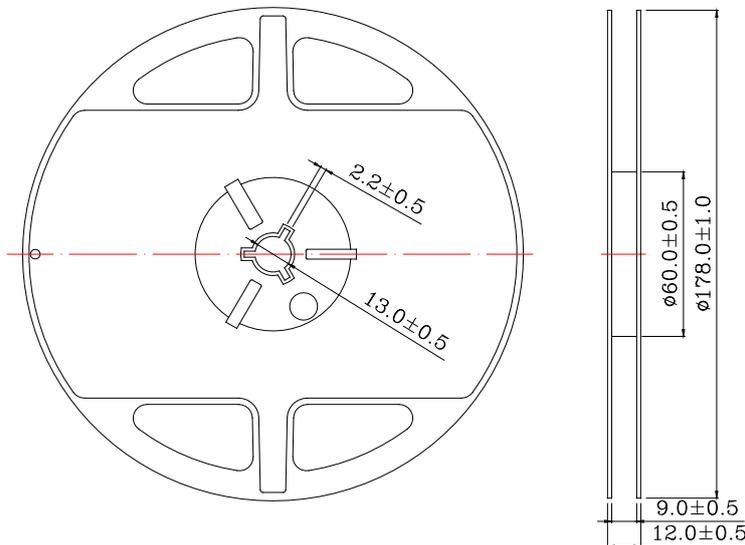

Notes:


The tolerances unless noted is±0.1mm, Angle±0.5°, Unit: mm.

# SURFACE MOUNT DEVICE LED

LT1808WDT-CW-S60

REV:A/0


## Packaging

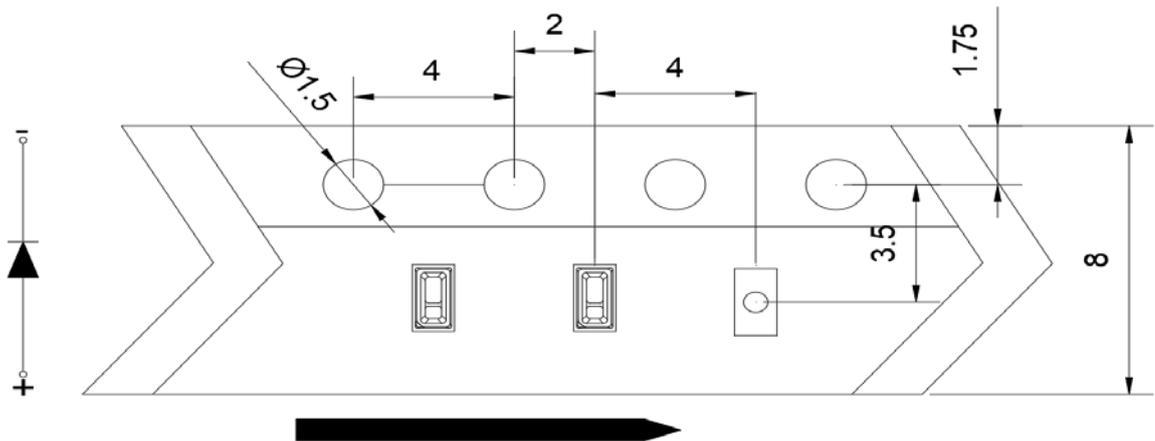

Note: Tolerance unless mentioned is  $\pm 0.1$ mm; Unit = mm

Carrier Tape Dimensions: Loaded Quantity 4000 pcs Per Reel.

## • Moisture Resistant Packaging

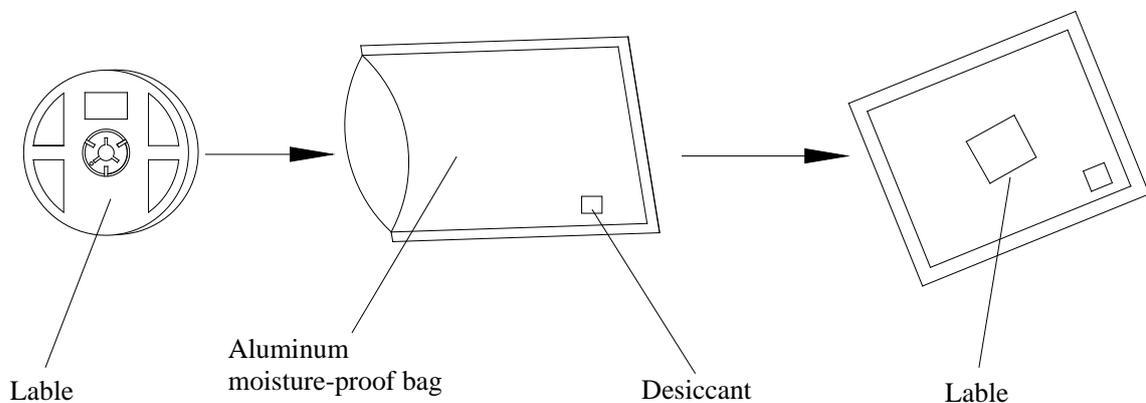

## ● Cleaning


- \* If cleaning is required, use the following solutions for less than 1 minute and less than 40°C.
- \* Appropriate chemicals: isopropyl alcohol. (When using other solvents, it should be confirmed beforehand whether the solvents will dissolve the package and the resin or not.)
- \* Effect of ultrasonic cleaning on the LED resin body differs depending on such factors as ultrasonic power and the assembled condition. Before cleaning, a pre-test should be confirmed whether any damage to the LEDs will occur.

# SURFACE MOUNT DEVICE LED


LT1808WDT-CW-S60

REV:A/0

- Suggest Sn/Pb IR Reflow Soldering Profile Condition:

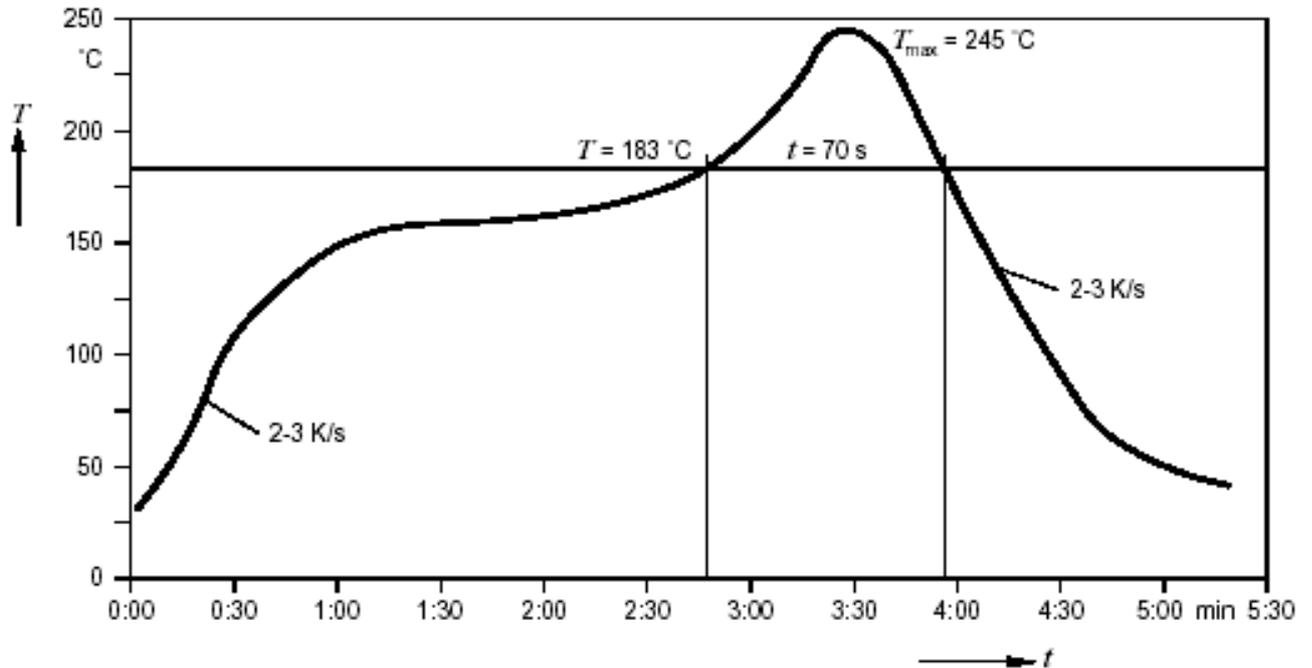

- Suggest Pb-Free IR Reflow Soldering Profile Condition:

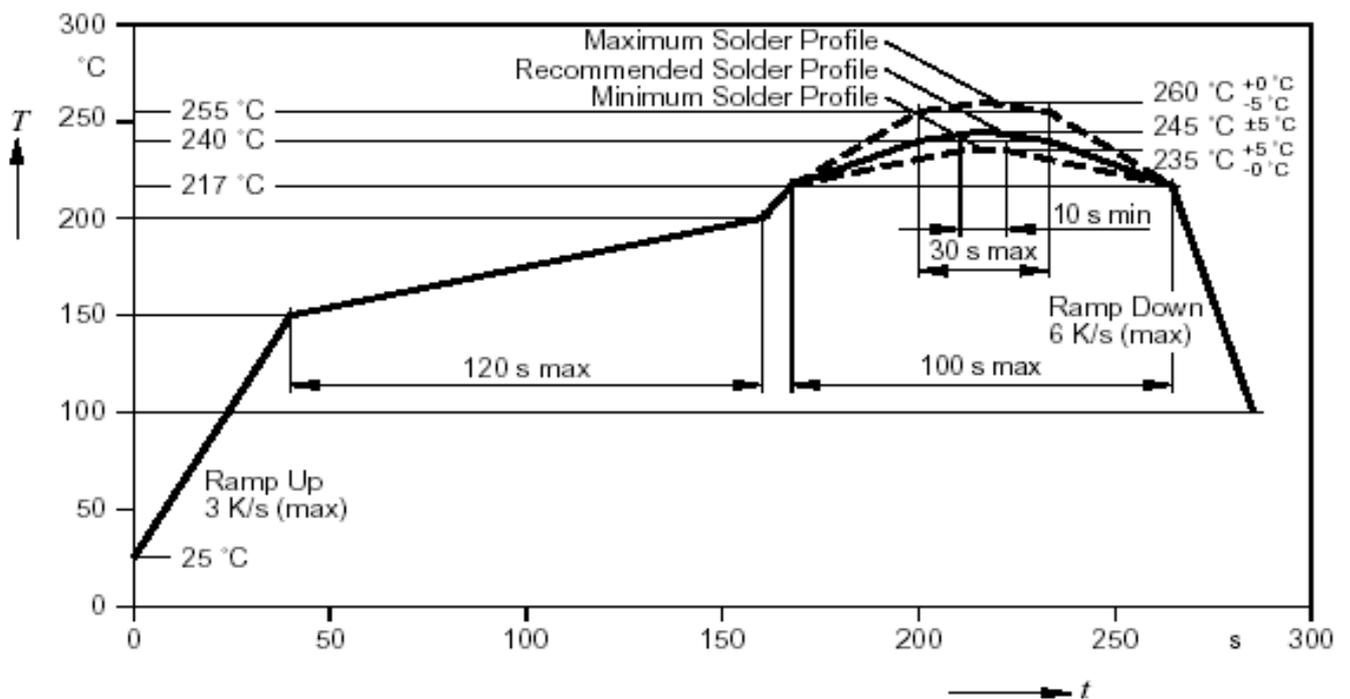

# SURFACE MOUNT DEVICE LED

LT1808WDT-CW-S60

REV:A/0

## ● CAUTIONS

### 1. Static Electricity:

\* Static electricity or surge voltage damages the LEDs.

It is recommended that a wrist band or an anti-electrostatic glove be used when handling the LEDs.

\* All devices, equipment and machinery must be properly grounded.

It is recommended that measures be taken against surge voltage to the equipment that mounts the LEDs.

\* When inspecting the final products in which LEDs were assembled, it is recommended to check whether the assembled LEDs are damaged by static electricity or not. It is easy to find static-damaged LEDs by a light-on test or a VF test at a lower current (blew 1mA is recommended).

\* Damaged LEDs will show some unusual characteristics such as the leak current remarkably increases, the forward voltage becomes lower, or the LEDs do not light at the low current.

Criteria: (VF>2.0V,at IF=0.5m A )

### 2. Storage :

\* Before opening the original package, it is recommended to store it in the following environment:  
temperature: 5 °C ~ 30 °C / humidity: maximum relative humidity: 60%.

\* After opening the original package, the LED should be used within 24 hours (1 day). Once installed, the welding should be fast. The workshop temperature shall be controlled at 5 ~ 30 °C and 30% or lower relative humidity.

\* In order to avoid moisture absorption, it is recommended to store the LED removed from the original packaging in a sealed container with appropriate desiccant or in a dryer with nitrogen environment.

\* The storage time of the original packaged products shall be less than 6 months. LED should be used after baking, it shall be baked at 65 °C for at least 12 hours; For all baked products, it is recommended to try 1-3 rolls first, and then put them into mass production without abnormality.

### 3. Soldering:

Do not apply any stress to the LED lens during soldering while the LED is at high temperature.  
Recommended soldering condition.

\* Reflow Soldering :

Pre-heat 120~150°C, 120sec. MAX., Peak temperature : 240°C Max. Soldering time : 10 sec Max.

\* Soldering Iron : (Not recommended)

Temperature 350°C Max., Soldering time : 3 sec. Max.(one time only), power dissipation of iron : 20W Max. use SN60 solder of solder with silver content and don't to touch LED lens when soldering.

# SURFACE MOUNT DEVICE LED

LT1808WDT-CW-S60

REV:A/0

## 4. Lead-Free Soldering


For Reflow Soldering :

- 1、 Pre-Heat Temp: 150-180℃,120sec.Max.
- 2、 Soldering Temp: Temperature Of Soldering Pot Over 240℃,40sec.Max.
- 3、 Peak Temperature: 260℃ , 10sec.
- 4、 Reflow Repetition: 2 Times Max.
- 5、 Suggest Solder Paste Formula : 93.3 Sn/3.1 Ag/3.1 Bi/0.5 Cu

For Soldering Iron (Not Recommended) :

- 1、 Iron Tip Temp: 350℃ Max.
- 2、 Soldering Iron: 30w Max.
- 3、 Soldering Time: 3 Sec. Max. One Time.

## 5. Drive Method

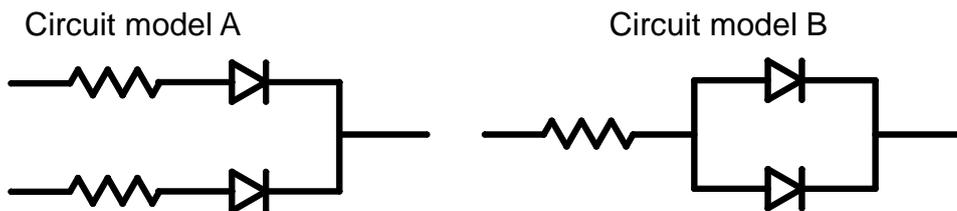

(A)Recommended circuit.

(B)The difference of brightness between LED`s could be found due to the Vf-I<sub>f</sub> characteristics of LED.

## 6. Reliability

### ①、 Criteria For Judging The Damage

Item	Symbol	Test Conditions	Criteria for Judgement	
			MIN.	Max.
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> =20mA	-	U.S.L.*)x1.1
Reverse Current	I <sub>R</sub>	V <sub>R</sub> =5V	-	U.S.L.*)x2.0
Luminous Intensity	I <sub>V</sub>	I <sub>F</sub> =20mA	L.S.L**)x0.7	-

\*) U.S.L.: Upper Standard Level

\*\*) L.S.L: Lower Standard Level

# SURFACE MOUNT DEVICE LED

LT1808WDT-CW-S60

REV:A/0

## ②、Test Items And Results

Test Item	Reference Standard	Test Condition	Note	Number of Damaged
Resistance to Soldering Heat (Reflow Soldering)	JEITA ED-4701300 301	Tsld=260℃,10sec. (Pre treatment 30℃,70%,168hrs)	2times	0/50
Solder ability (Reflow Soldering)	JEITA ED-4701300 303	Tsld=215℃,3sec. (Lead Solder)	1time over 95%	0/50
Thermal Shock	JEITA ED-4701300 307	-40℃ ~ 100℃ 30min. 30min.	100cycles	0/50
Temperature Cycle	JEITA ED-4701100 105	-40℃ ~ 25℃~100℃~25℃ 30min. 5min. 30min. 5min	100cycles	0/50
High Temperature Storage	JEITA ED-4701200- 201	Ta=100℃	1000hrs.	0/50
Temperature Humidity Storage	JEITA ED-4701100 103	Ta=60℃,RH=90%	1000hrs.	0/50
Low Temperature Storage	JEITA ED-4701200 202	Ta=-40℃	1000hrs.	0/50
Steady State Operating Life Condition		Ta=25℃,IF=20mA	1000hrs.	0/50
Steady State Operating Life of High Temperature		Ta=85℃,IF=5mA	500hrs.	0/50
Steady State Operating Life of High Humidity Heat		Ta=60℃,RH=90%,IF=15mA	500hrs.	0/50
Steady State Operating Life of Low Temperature		Ta=-30℃,IF=20mA	500hrs.	0/50
Vibration	JEITA ED-4701400 403	100~2000~100HzSweep 4min.200m/s <sup>2</sup> 3direction,4cycles	48min	0/50
Substrate Bending	JEITA ED-4702	3mm,5±1sec	1time	0/50
Stick	JEITA ED-4702	5N,10±1sec	1time	0/50

### 7.Others:

The appearance and specifications of the product may be modified for improvement without notice.